


Project Phase 2: Final Design

Fireboat - The Dalmatian

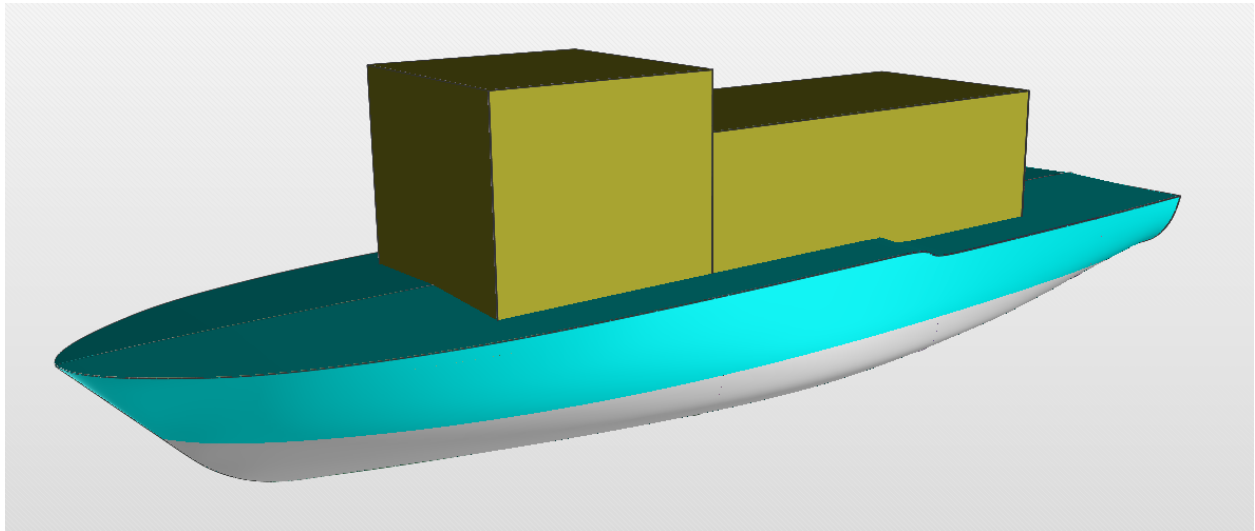

April 18, 2024

Aidan Sarkozy - V00937139
Colm Molder - V00937879
Blaine Tubungbanua - V00918128

Summary

This report outlines the preliminary design of the Dalmatian, a firefighting and rescue vessel intended to operate on the wildfire prone Okanagan Lake in the interior of British Columbia, Canada. The principal particulars of this vessel are based on similar vessels and iterative design. These values are shown in Table 0 below.

Table 0: Principal Particulars

Particular	Value
Length Overall L (m)	20
Waterline Length (m)	20.358m
Beam (m)	6
Depth (m)	2
Design Draft (m)	1.25
Design Freeboard (m)	0.75
Displaced Volume (m ³)	85
Displacement (t)	85
Lightship (t)	56.2
Deadweight (t)	28.8
Service Speed (kts)	28
Maximum Speed (kts)	32
Block Coefficient	0.5561
Froude Number (@ 28kts)	1.027
Prismatic Coefficient	0.6644
Waterplane Coefficient	0.8339
Midship Coefficient	0.8369
Longitudinal Centre of Buoyancy (m)	9.922
Wetted Surface Area (m ²)	119.2
Installed Power [kW]	2460

Table of Contents

1 Introduction and Background Information	6
1.1 Vessel Mission Objectives	6
1.2 Intended Area of Operation	6
1.3 Operational Profile	8
1.4 Environmental Conditions	8
2.0 Applicable Regulations	9
3.0 Design Concept	10
3.1 Design Requirements	10
3.2 Payload and Equipment Definition	10
3.3 Mission-critical Systems and Features	11
3.4 Similar Vessels	12
4. Propulsion	15
4.1 Fuel Type	15
4.2 Final Powering and Propulsion Configuration	16
5. Structure	16
5.1 Vessel Overview	17
5.2 Structural Material	17
6. Weight Estimate	17
6.1 SNAME Empirical Lightship Estimate	18
6.2 Delftship Parent Hull Lightship Estimate	20
6.3 Deadweight Estimate	21
6.4 Weight Summary	22
7.0 Hull Form	22
7.1 Preliminary Principal Hull Dimensions and Form Coefficients	22
7.2 Final Design Values	24
7.3 Sectional Areas Curve	26
7.4 Hydrostatics	26
7.3 Line Plans	28
7.5 Bonjean Plots	29
7.6 Resistance	29
8. Stability	30
8.1 Floodable Lengths	30
8.2 Wind Heeling Moment	31
8.3 Stability Curve	32
9. Machinery Selection	33
9.1 Diesel Engine	33
9.2 Water-jet Drive	33

9.3 Electric Generator	33
9. Equipment Selection	34
9.1 Lifesaving Equipment	34
9.1.1 RIBO 340	34
9.1.2 Davit Arm	35
9.2 Firefighting Equipment	35
10. General Arrangements	36
References	38
Appendix: Delftship Outputs	39

List of Figures

Figure 1: Okanagan Lake - Summer 2023	6
Figure 2: Okanagan Lake	7
Figure 3: Operation profile of Vessel	8
Figure 4: Historical wind data for Kelowna Airport [5]	9
Figure 5: Robert Allen, The Christopher Wheatley, [2]	12
Figure 6: Christopher Wheatley Deck Plan [2]	12
Figure 7: Robert Allen P-2000 [2]	13
Figure 8: Robert Allen Ranger P-2000 Deck Plan [2]	13
Figure 9: Russel Brothers LTD, WM Lyon Mackenzie [3]	14
Figure 10: WM Lyon Mackenzie Deck Plan [3]	14
Figure 11: Overall vessel structure and shape	17
Figure 12: Outfit weight coefficient graph	20
Figure 13: Isometric View of hull	25
Figure 14: Side view of Hull	25
Figure 15: Fore and Aft view of Hull	25
Figure 15: Curve of Areas	26
Figure 17: Curves of Form	27
Figure 18: Cross Curves of Stability	28
Figure 19: The Dalmatian Line Plans	29
Figure 20: Hydrodynamic Resistance	30
Figure 21: Floodable Length	31
Figure 22: Wind Silhouette	31
Figure 23: Stability Curve	32
Figure 24: Rolls Royce MTU S60	33
Figure 25: HamiltonJet HJ403 Water-jet drive	33
Figure 26: Onan MDKAF Genset	34

List of Tables

Table 0: Principal Particulars	1
Table 1: National Fire Protection Association Fireboat Classification [1]	6
Table 2: Locations of Major Cities Along Lake Okanagan	8
Table 3: Performance Requirements of The Dalmatian	10
Table 4: Comparison of In-use Fireboat Dimensions	15
Table 5: Propulsion and Powering	16
Table 6: Empirical Weight coefficients K and E. [SNADES]	19
Table 7: Machinery Weight Estimation	19
Table 8: Lightship Weights	20
Table 9: Lightship weight estimates from Delftship	21
Table 10: Full Weight Estimates	21
Table 11: Vessel tonnage summary	22
Table 12: Preliminary Hull Dimensions and Form Coefficients	23
Table 13: Typical Values of Coefficients of Fineness	23
Table 14: Finalized Vessel Particulars	24
Table 15: Wind Heeling Moment Parameters	32

1 Introduction and Background Information

1.1 Vessel Mission Objectives

The type of vessel is a Class A Fireboat (based on Table 1). The name selected for our vessel is The Dalmatian (the DAL).

Table 1: National Fire Protection Association Fireboat Classification [1]

<i>Class A Fireboats</i>	<i>Class B Fireboats</i>	<i>Class C Fireboats</i>
Length of vessel, 65 ft. and over	Length of vessel, 40 – 65 ft.	Length of vessel, 20 – 40 ft.
Minimum pump capacity, 5,000 GPM	Minimum pump capacity, 2,500 GPM	Minimum pump capacity, 500 GPM
Minimum net pump pressure 150 psi	Minimum net pump pressure, 150 psi	Minimum net pump pressure, 150 psi
Minimum Number of Pumps, 2	Minimum number of pumps, 1	Minimum number of pumps, 1
Minimum number of generators, 2	Minimum number of generators, 1	Minimum number of generators, 0
Minimum number of monitor pipes, 4	Minimum number of monitors, 2	Minimum number of monitors, 1
Minimum crew, 3	Minimum crew, 2	Minimum crew, 2
Minimum # of hose connection: 6 – 1 ½ connections 10 – 2 ½ connection or larger	Minimum # of hose connections: 4 – 1 ½ connections 8 – 2 ½ connections or larger	Minimum number of hose connections: 1 – 2 ½ connection 2 – 1 ½ connections
Fuel capacity, 8 hours	Fuel capacity, 8 hours	Fuel capacity, 4 hours

The aims of this vessel are as follows:

- Suppress lakefront fires with water cannons
- Quickly deploy and recover fire crews and equipment
- Serve as emergency transport for civilians
- Act as a mobile water pump for rural areas
- Perform auxiliary tasks as necessary

The importance of a vessel of this nature was observed during the 2023 Okanagan fires that placed Kelowna and surrounding municipalities into a state of emergency.

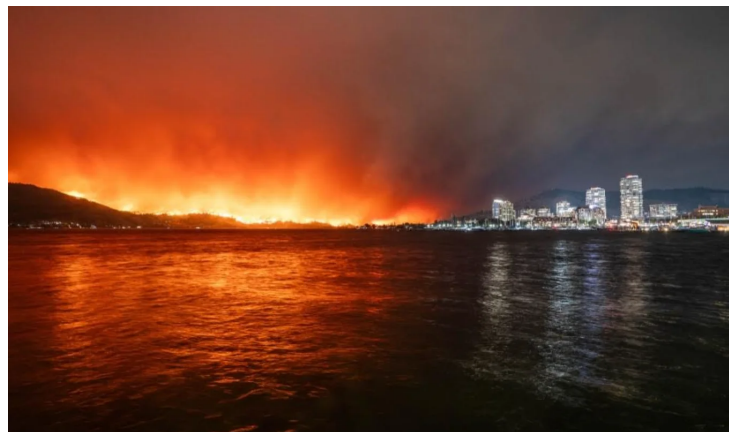


Figure 1: Okanagan Lake - Summer 2023

1.2 Intended Area of Operation

The Dalmatian is a fire suppression vessel designed to operate in interior British Columbia lakes with an intended initial deployment in Okanagan Lake, as seen below.

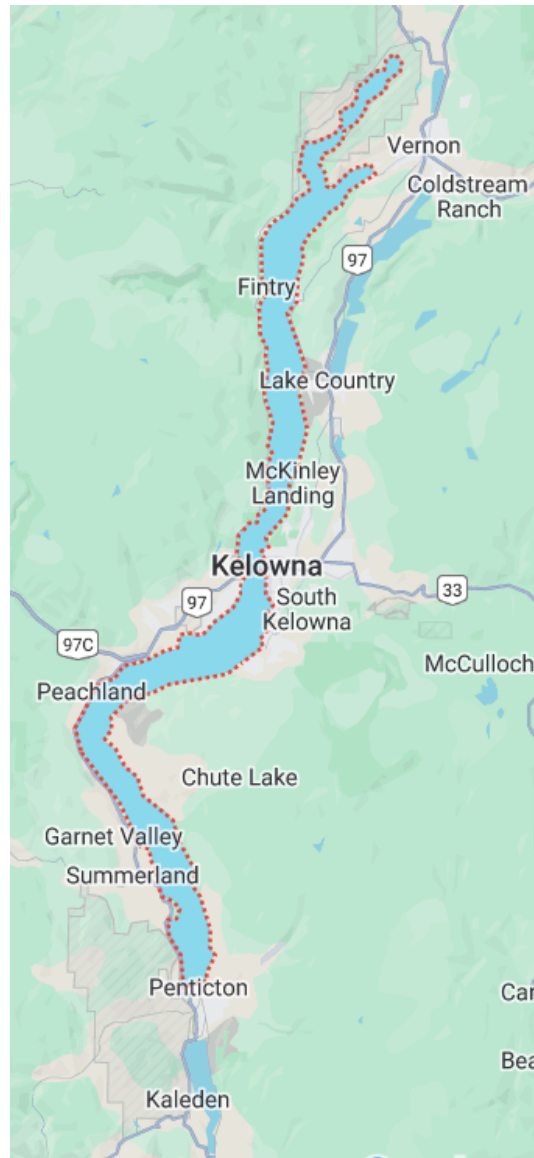


Figure 2: Okanagan Lake

Okanagan Lake is a large freshwater lake that has a max length of 135km and a max width of 5km. It has a surface area of 351km², an average depth of 76m, and sits at an elevation of 342m above sea level. The centre of Okanagan Lake is located at: 49°54'40.0"N 119°30'45.0"W.

Due to the size of the operation region, the speed of the vessel will be vital to promptly respond to emergencies.

The locations of key cities along Okanagan Lake are presented in Table 2. They represent the boundaries of the operation area and operation supply points.

Table 2: Locations of Major Cities Along Lake Okanagan

City	Longitude, Latitude
Kelowna	49° 53' 17" N, 119° 29' 44" W
Vernon	50° 16' 0" N, 119° 16' 18" W
Penticton	49° 30' 3" N, 119° 35' 38" W

1.3 Operational Profile

The vessel is intended to primarily operate in the warm summer months when the need for firefighting and emergency transportation is heightened. A typical operation period would be between May and November, or about half the year. For the rest of the year, the vessel would be placed in storage and only accessed in the case of an extended emergency. When in use, the Dalmatian will split its time between firefighting and emergency transportation tasks. The amount of time spent on each will depend on the current fire conditions but on average it is expected that the Dalmatian will fight fires for some portion of time every year. This operation profile is illustrated in Figure 3, where the percentage of each operation represents the amount of time spent relative to other operations over the vessel's lifetime.

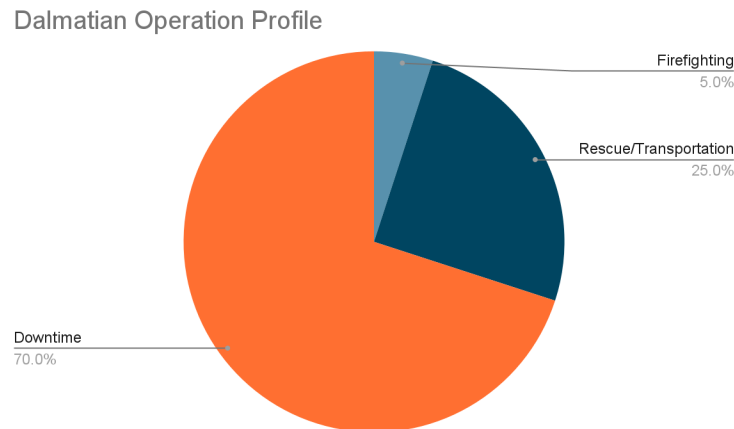


Figure 3: Operation profile of Vessel

1.4 Environmental Conditions

Kelowna and, by proxy, Okanagan Lake have the greatest percentage of "calm" wind observations for any major city in Canada (39% of the time) [5]. These calm winds lead to minimal wave formation on the lake and thus allow for the extended life of marine vessels

operating within the area. Historic wind conditions from 1981 to 2010 and averaged by month can be observed in the figure below.

1981 to 2010 Canadian Climate Normals station data												
	Wind											
	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Speed (km/h)	4.6	4.7	6.0	6.6	6.7	6.7	6.4	5.3	4.6	4.4	4.1	4.7
Most Frequent Direction	N	N	N	N	S	S	N	N	N	N	N	N
Maximum Hourly Speed (km/h)	56	50	50	56	46	56	54	48	52	56	56	46
Date (yyyy/dd)	1974/29	1990/05	2004/05	1968/11	2002/02	1967/03	1997/24	1966/10	1978/15	1963/21	1962/29	2001/17
Direction of Maximum Hourly Speed	N	SE	S	SE	SW	N	NW	NW	N	S	SE	SW
Maximum Gust Speed (km/h)	93	74	89	100	82	87	83	84	67	76	84	80
Date (yyyy/dd)	1999/29	1990/05	1973/16	1980/14	1975/18	1989/24	1998/30	1972/21	1983/01	1991/16	1975/03	1979/14
Direction of Maximum Gust	SE	SE	W	S	N	N	E	S	SW	W	S	N
Days with Winds >= 52 km/h	0.1	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.0	0.1	0.1	0.1
Days with Winds >= 63 km/h	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Figure 4: Historical wind data for Kelowna Airport [5]

Empirical wave data for Okanagan Lake is limited to non-existent. One source of simulated wave data comes from an analysis performed by Eric Morris, a previous Master's student at UBC. They found the maximum wave height on Okanagan Lake near Kelowna to be 1.36 meters with a period of 4 seconds [6].

2.0 Applicable Regulations

The design and operation of fireboats are governed by the National Fire Protection Association's document number 1925. The document outlines the minimum rules and regulations required to be followed by all new and converted marine firefighting vessels. The links to these regulations are seen below.

NFPA 1925: Standard on Marine Fire-Fighting Vessels
<https://www.nfpa.org/codes-and-standards/1/9/2/1925?l=374>

NFPA 1925: references ABS's Rules for Building and Classing Steel Vessels for Service on Rivers and Intracoastal Waterways
https://ww2.eagle.org/content/dam/eagle/rules-and-guides/current/conventional_ocean_service/4-rules-for-building-and-classing-steel-vessels-for-service-on-rivers-and-intracoastal-waterways-2024/4-river-rules-jan24.pdf

3.0 Design Concept

This section discusses an overview of the design concept and high level requirements.

3.1 Design Requirements

The overall performance requirements of the DAL are tabulated below.

Table 3: Performance Requirements of The Dalmatian

Roles	Fire Suppression, Crew mobility, Transport, Water pump
Crew	10
Passengers	50
Service Area	BC lakes (freshwater)
Service Life	20 years
Top Speed	32 knots (60km/h)

3.2 Payload and Equipment Definition

A preliminary list of payloads is seen below.

- Water cannon(s)
- Firefighting PPE, tanks, clothing (~80lb/person), hoses
- Aerial Tower (Person Crane)
- Equipment Crane
- Secondary RIB
- Fire suppressant
- Medical Equipment: Resuscitators, aspirator, stretchers, med supplies
- Crew: 10x firefighters
- Capacity to carry 50 evacuees.

3.3 Mission-critical Systems and Features

The mission-critical systems and features are as follows:

- Room for crew and civilians
- Ability to pump water from the lake
 - Used to feed water cannons
 - Able to be connected to fire hoses
- Storage room for fire fighting equipment
- Crane to deploy and receive heavy equipment
- Medical center for injured crew and civilians
- Bathroom
- Minimum two means of escape from the main hull to the main weather deck
- Rescue slide
- Transom gate
- Dive platform

3.4 Similar Vessels

There are existing vessels that serve the functions required. These vessels were investigated to inform the design of the Dalmatian. The Dalmatian's form will be similar to The Christopher Wheatly, J-2000, and WM Lymon Mackezie as seen below.



Figure 5: Robert Allen, The Christopher Wheatley, [2]

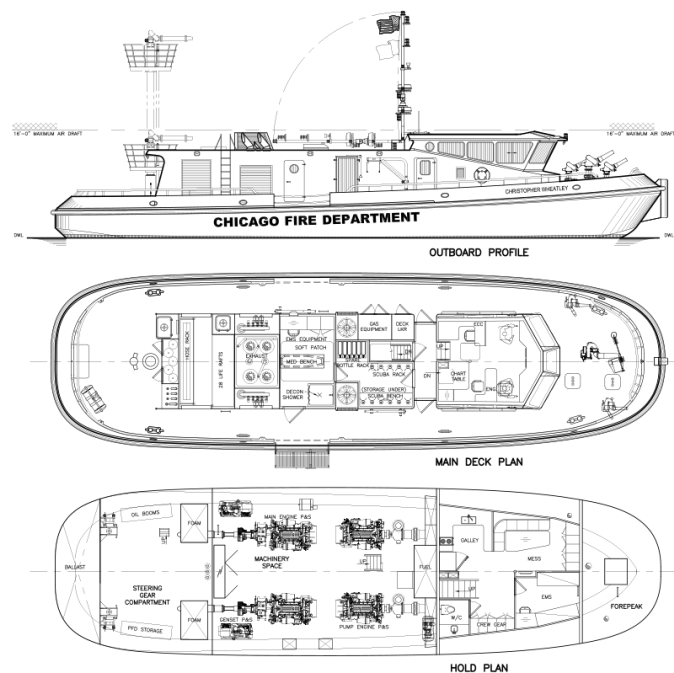


Figure 6: Christopher Wheatley Deck Plan [2]



Figure 7: Robert Allen P-2000 [2]

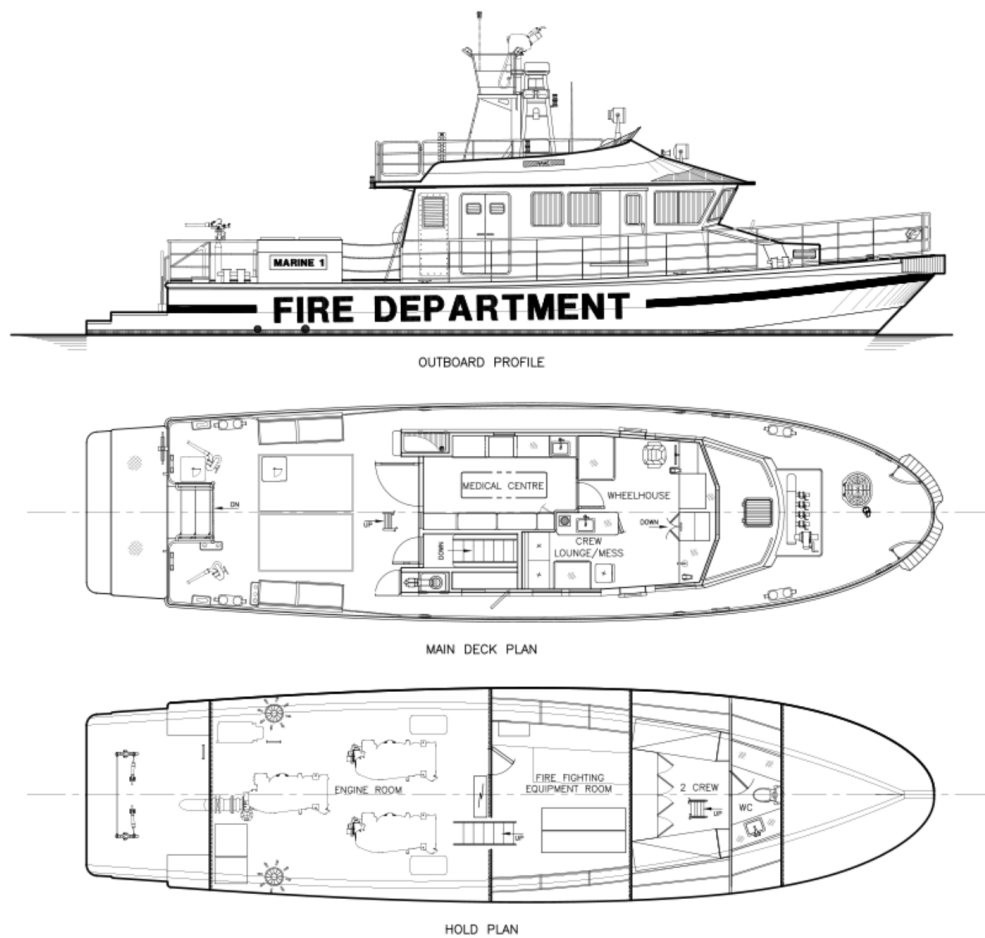


Figure 8: Robert Allen Ranger P-2000 Deck Plan [2]



Figure 9: Russel Brothers LTD, WM Lyon Mackenzie [3]

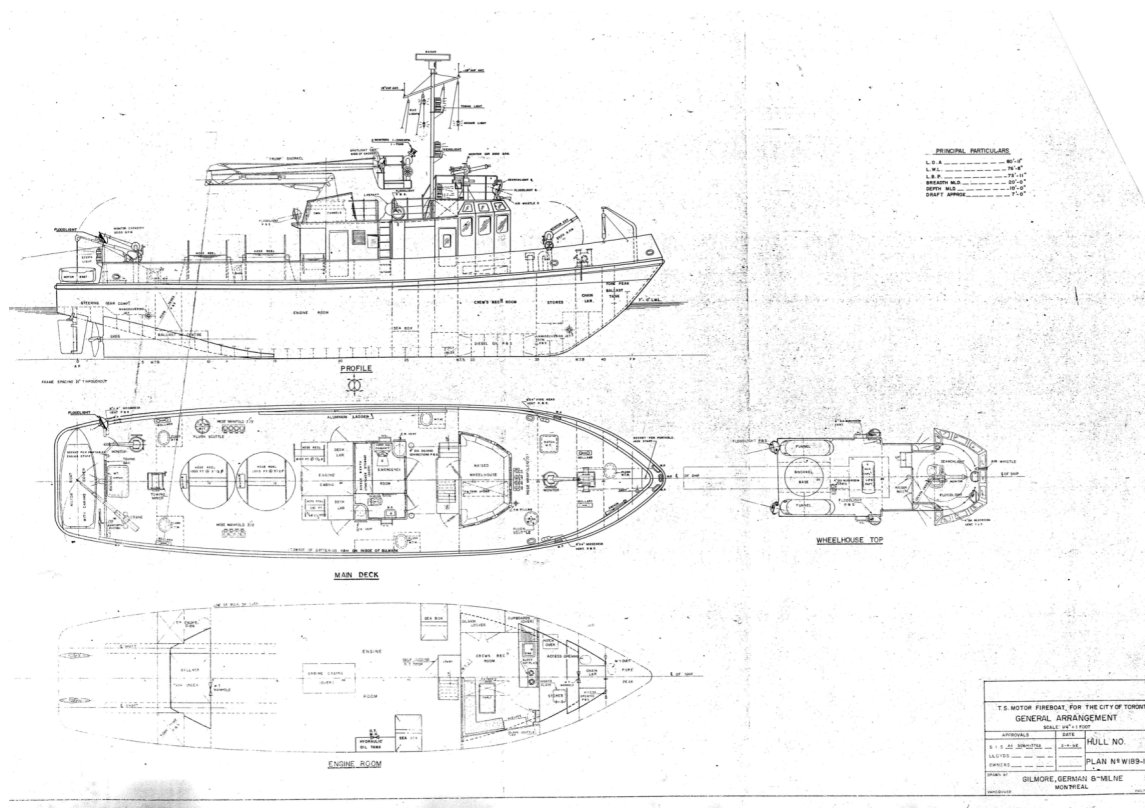


Figure 10: WM Lyon Mackenzie Deck Plan [3]

Seen below in Table 6 is a comparison of familiar vessels.

Table 4: Comparison of In-use Fireboat Dimensions

Class/Name	Shipbuilder	Displacement (t)	Length Overall (m)	Beam (m)	Draft (m)
RAnger J-2000	Robert Allan	N/A	20	5	1.3
RAnger P-2000	Robert Allan	N/A	20.15	6	0.81
RAnger P-2400	Robert Allan	N/A	24.1	6.76	2.13
14M Fire Boat	Walker Marine Design	26	14.45	4.25	1.5
25M Fire Boat	Walker Marine Design	75	25.58	7.9	1.22

From these values, an overall length of 20m, a beam of 6m, a design draft of 1.250m, and a displacement of 75 tonnes are selected as a starting point for the iterative design of the ship.

4. Propulsion

This section discusses potential alternative fuel types, and the final propulsion configuration.

4.1 Fuel Type

In the conceptual design of a new vessel, and with carbon emission goals, it is important to consider alternative fuels. These are compared to Diesel as a baseline fuel. Alternative fuels include Hydrogen, Ammonia, and Liquified Natural Gas. Hydrogen is a tempting option because its combustion only produces water vapor. Production is currently sourced from natural gas, but there is potential to produce net-zero carbon hydrogen by electrolysis with renewable energy. However, to achieve any reasonable energy density, hydrogen must be cryogenically stored, requiring extra machinery, and is difficult to handle due to cryogenic temperatures causing plumbing malfunctions. Ammonia is another option, with the potential for zero-carbon production. Ammonia is toxic and has challenges in spark-ignition and compression-ignition. It is a potential fuel for a future marine vessel. Liquid Natural Gas is another potential fuel, with the potential to reduce emissions by 25%. [7]

However, due to the limited lakeside infrastructure on Lake Okanagan, such as the lack of LNG bunkering facilities, or hydrogen fuel stations, the required cost to install this infrastructure would exceed the resources of the stakeholders, especially as a limited number of vessels could operate on such fuels at the moment. Therefore, diesel fuel is selected to power the vessel, as it is already readily accessible on the lake.

4.2 Final Powering and Propulsion Configuration

Based on the research of similar vessels made by Robert Allan, four propulsion options exist. These are water jets, conventional props, z-drives, or voith drives. Although voith and z-drives provide superior maneuverability, water jets were selected for the Dalmatian. This selection was made to exploit their superior speed and shallow draft. The shallow draft provided by jet propulsion is important for the DAL to closely approach shore without damaging its propellers. High speed is also a valuable asset to quickly deploy crews and respond to fires.

Using water jet propulsion, the RAnger J-2000 was used for comparison as it is a 20m long firefighting vessel [6]. This vessel uses four jet propulsors powered by four diesel 615kW engines. All four motors can be used for propulsion during fast travel, and the central two are used to drive fire pumps when required. This propulsion system is capable of moving the RAnger J-2000 67km/hr, which is over the desired 60km/hr. A similar methodology of propulsion and powering is planned to be used by the DAL.

For electrical power, the RAnger J-2000 requires two 27.5kW diesel gen-sets. The DAL will likely require similar power.

A summary of the planned propulsion and powering is tabulated below.

Table 5: Propulsion and Powering

Propulsion	4x Water Jets
Engines	4x 615kW Diesel
Electrical Generation	2x 27.5kW Diesel Gen-sets
Top Speed	32 knots

5. Structure

This section discusses the vessel structural configuration and structural material.

5.1 Vessel Overview

From researching firefighting vessels, it was determined that their hull shape very closely matches that of a tugboat. Understanding this led to the use of a tug boat parent hull as an initial starting point for a Delftship analysis of the vessel. Adding early superstructure outlines to the hull resulted in the vessel shape seen in Figure 11.

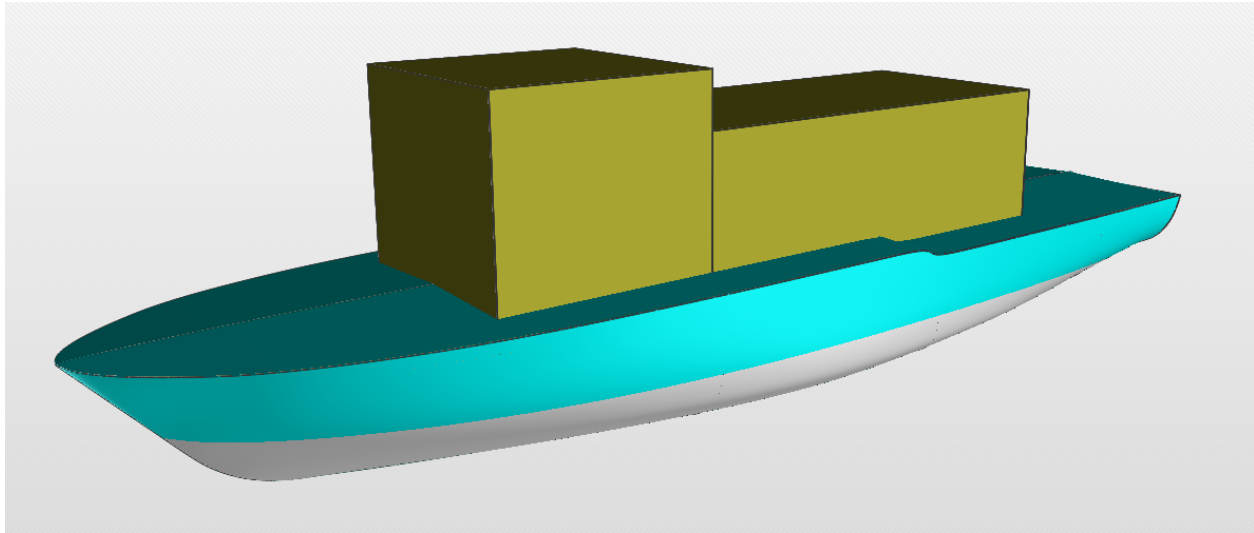


Figure 11: Overall vessel structure and shape

5.2 Structural Material

The ship's hull will be made of 13mm thick steel sheet to meet ABS's "Rules for Building and Classing Steel Vessels for Service on Rivers and Intracoastal Waterways". To save weight the superstructure will be composed of 20mm thick aluminum plate. These materials are assumed constant throughout their respective structures.

6. Weight Estimate

This section discusses weight estimates. The lightship is estimated with two methods. SNAME's method using empirical relations, as well as a mass estimate from DELFTShip and the selected parent hull. Deadweight values are also tabulated, based on known equipment requirements.

6.1 SNAME'S Empirical Lightship Estimate

The Dalmatian's weight was initially estimated using empirical calculations from SNAME's Ship Design and Construction [8]. The Lightship is separated into four weight groups.

- Structural (W_s)
- Machinery (W_m)
- Outfit (W_o)
- Weight Margin (W_{margin})

These are calculated using empirically derived formulas based on historical ship data for tugboats, fitted to the Dalmatian's Draft, and block coefficient. Lightship is calculated as the sum of these weight groups

$$W_{LS} = W_s + W_m + W_o + W_{margin}$$

Weight estimates will be based on the block coefficient at 80% depth: C_B' , using the parent hull values from delftship present a block coefficient of 0.4934.

$$C_B' = C_B + (1 - C_B) \frac{0.8D - T}{3T} = 0.54$$

Computing the structural weight, an empirical formula using Lloyd's equipment numeral $K \approx 0.044$, and empirical weight coefficient $E \approx 400$, from Table 7 for tugs, as well as and block coefficient at 80% of depth C_B' is used. This estimate assumes 100% mild steel construction.

$$W_s = KE^{1.36} [1 + 0.5(C_B' - 0.70)]$$
$$W_s \approx 140 \text{ tonnes}$$

Table 6: Empirical Weight coefficients K and E. [SNADES]

TABLE 11.VII Structural Weight Coefficient K (1, 18)

<i>Ship type</i>	<i>K mean</i>	<i>K range</i>	<i>Range of E</i>
Tankers	0.032	±0.003	1500 < E < 40 000
Chemical tankers	0.036	±0.001	1900 < E < 2500
Bulk carriers	0.031	±0.002	3000 < E < 15 000
Container ships	0.036	±0.003	6000 < E < 13 000
Cargo	0.033	±0.004	2000 < E < 7000
Refrigerator ships	0.034	±0.002	4000 < E < 6000
Coasters	0.030	±0.002	1000 < E < 2000
Offshore supply	0.045	±0.005	800 < E < 1300
Tugs	0.044	±0.002	350 < E < 450
Fishing trawlers	0.041	±0.001	250 < E < 1300
Research vessels	0.045	±0.002	1350 < E < 1500
RO-RO ferries	0.031	±0.006	2000 < E < 5000
Passenger ships	0.038	±0.001	5000 < E < 15 000
Frigates/corvettes	0.023		

Weight for the machinery is based on the RAnger 2000, 4x MTU Series 60 main engines, 4x Hamilton Model HJ403 waterjets, and 2x Onan diesel gen-sets. These weights are tabulated in Table 8.

Table 7: Machinery Weight Estimation

Machine	Unit Weight (t)	Qty	Total Weight (t)
MTU S60	1.941	4	7.764
HJ403	0.638	4	2.552
Onan Generator	0.533	2	1.066
TOTAL			11.382

The outfit weight includes the remainder of the lightship weight. This includes the electrical plant, auxiliary systems, HVAC, joiner work, furniture, electronics, paint, etc. Using Figure 11, the outfit weight can be estimated. This figure does not include tugboats, nor does it have data for boats with an LBP of 20m. Approximating $C_o \approx 0.20$, this model estimates an outfit weight.

$$W_o = C_o LB$$

$$W_o \approx 24 \text{ tonnes}$$

This value seems high, given our current displacement at draft constraint of ~80 tonnes.

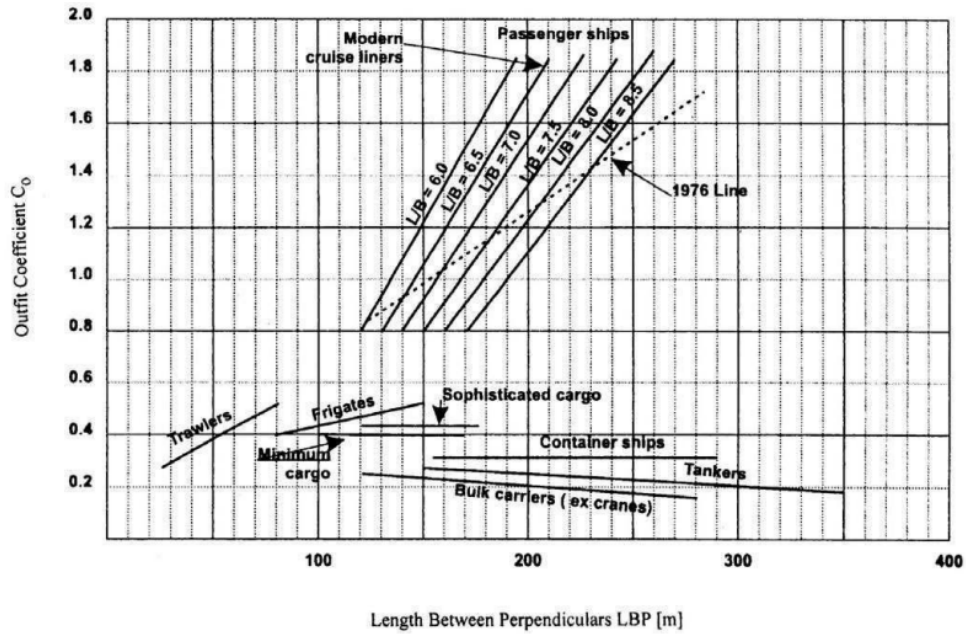


Figure 12: Outfit weight coefficient graph

The lightship estimates are summarized in Table 9

Table 8: Lightship Weights

Lightship Weights	
Ws	140.1825402
Wm	11.382
Wo	24
Total	175.5645402
+5% margin	184.3427672

This lightship value is much higher than similar vessels researched. It is possible that the block coefficient used in the parent hull is not representative of a tugboat and could be the reason for the discrepancy. More accurate values for the lightship can be calculated by summing the weight of individual components and using Delftship to give proper hull tonnage values.

6.2 Delftship Parent Hull Lightship Estimate

Analyzing the ships structure in Delftship yielded the lightship weight estimates seen below in Table 10.

Table 9: Lightship weight estimates from Delftship

The following layer properties are calculated for both sides of the ship

Location	Area m ²	Thickness m	Weight t	LCG m	TCG m	VCG m
Hull	370.18	0.013	36.324	9.460	0.000 (CL)	1.751
Super Structure	368.00	0.020	19.872	10.922	0.000 (CL)	4.170
Total	738.18		56.196	9.977	0.000 (CL)	2.606

Adding onto these structure weights an estimated 6.56 tons for engines, the full lightship value is found as 62.761 tons. These values more closely resemble the weights of similar sized fireboats.

6.3 Deadweight Estimate

To calculate the deadweight estimate, the list of payloads, and their masses must be summed. The fuel, potable water, and Fi-Fi foam tank capacities are taken from the RAnger 2000. The boat is expected to be used as a day-use vessel, so provisions for only one day are considered. Using the estimates from [8].

Table 10: Full Weight Estimates

Item	Tonnage	VCG (m above keel)	LCG (m forward of aft perp)
Hull	36.324	1.751	9.46
Superstructure	19.872	4.17	10.922
Engines	6.565	1.433	5.12
Fuel	3.72	0.765	9.947
Propulsors	2.205	1.67	1.185
Gensets	1.004	1.302	10.002
Crew Quarters	0.633	1.453	15.664
Equip + Med	0.79	3.7	8
Wheelhouse Interior	0.547	4.2	14
Potable Water	0.189	1.185	11.994
Foam	0.809	1.185	9.502
Storage	0.108	1.827	9.993
Ballast	2.547	0.135	12.016
Aerial Tower	1.5	5	10
Equipment Crane	0.55	2.4	0.5
Fore 2000 GPM monitor	0.028	2.4	18
Aft 2000 GPM monitor	0.028	2.4	1

Aerial 2000 GPM Monitor	0.028	5	10
Rigid Inflatable Boat (RIB)	0.641	2.4	2
Crew	1.7	N/A	N/A
Provisions	0.1	N/A	N/A
Fire Fighting PPE	0.036	N/A	N/A
Passengers	5	N/A	N/A
TOTAL	84.924	2.145557287	8.558686461

6.4 Weight Summary

Summarizing lightship and deadship weights, the total weight of the Dalmatian is obtained.

Table 11: Vessel tonnage summary

Weight	tonnes
Lightship	62.761
Deadship	22.163
TOTAL	84.924
LCG (m FWD app)	8.56
VCG (KG, m)	2.15

This value is much closer to similar sized fire fighting vessels and was used for the remainder of the analysis and report.

7.0 Hull Form

The hull form was informed by existing fire boats currently in service. Inspiration was drawn from the William Lyon Mackenzie, a modified tugboat. As such, it was decided to use a modified tugboat parent hull. Additionally, a shallow draft of 1.25m was prioritized to allow the vessel to enter shallow waters to fight onshore fires.

7.1 Preliminary Principal Hull Dimensions and Form Coefficients

Based on similar vessels (see section 3.4), initial values of length, beam, depth, draft, and displacement were estimated, and ranges of coefficients of fineness were estimated between estimates for that of a tugboat and a yacht using table 13.

Table 12: Preliminary Hull Dimensions and Form Coefficients

Particular	Value
Length L (m)	20
Beam B (m)	6
Depth (m)	2
Draft (m)	1.25
Displacement (t)	75
Block Coefficient	0.4937
Prismatic Coefficient	0.6263
Midship Area Coefficient	0.7881

Table 13: Typical Values of Coefficients of Fineness

Type of Vessel	Block Coefficient	Prismatic Coefficient	Midship Area Coefficient
Crude oil carrier	0.82–0.86	0.82–0.90	0.98–0.99
Product carrier	0.78–0.83	0.80–0.85	0.96–0.98
Dry bulk carrier	0.75–0.84	0.76–0.85	0.97–0.98
Cargo ship	0.60–0.75	0.61–0.76	0.97–0.98
Passenger ship	0.58–0.62	0.60–0.67	0.90–0.95
Container ship	0.60–0.64	0.60–0.68	0.97–0.98
Ferries	0.55–0.60	0.62–0.68	0.90–0.95
Frigate	0.45–0.48	0.60–0.64	0.75–0.78
Tug	0.54–0.58	0.62–0.64	0.90–0.92
Yacht	0.15–0.20	0.50–0.54	0.30–0.35
Icebreaker	0.60–0.70		

7.2 Final Design Values

The tugboat parent hull was selected from the DELFTship database and was created by M. van Engeland. This hull was scaled to a length of 20m, a beam of 6m, and a draft of 1.25m as previously discussed.

The ship's finalized dimensions and hull form coefficients are tabulated below, with graphic renderings shown in figures to 12 to 14. with more information seen in the hydrostatic report in the Appendix.

Table 14: Finalized Vessel Particulars

Particular	Value
Length Overall L (m)	20
Waterline Length (m)	20.358m
Beam (m)	6m
Depth (m)	2
Design Draft (m)	1.25
Design Freeboard (m)	0.75
Displaced Volume (m ³)	85
Displacement (t)	85
Lightship (t)	56.2
Deadweight (t)	28.8
Service Speed (kts)	28
Maximum Speed (kts)	32
Block Coefficient	0.5561
Froude Number (@ 28kts)	1.027
Prismatic Coefficient	0.6644
Waterplane Coefficient	0.8339
Midship Coefficient	0.8369
Longitudinal Centre of Buoyancy (m)	9.922
Wetted Surface Area (m ²)	119.2

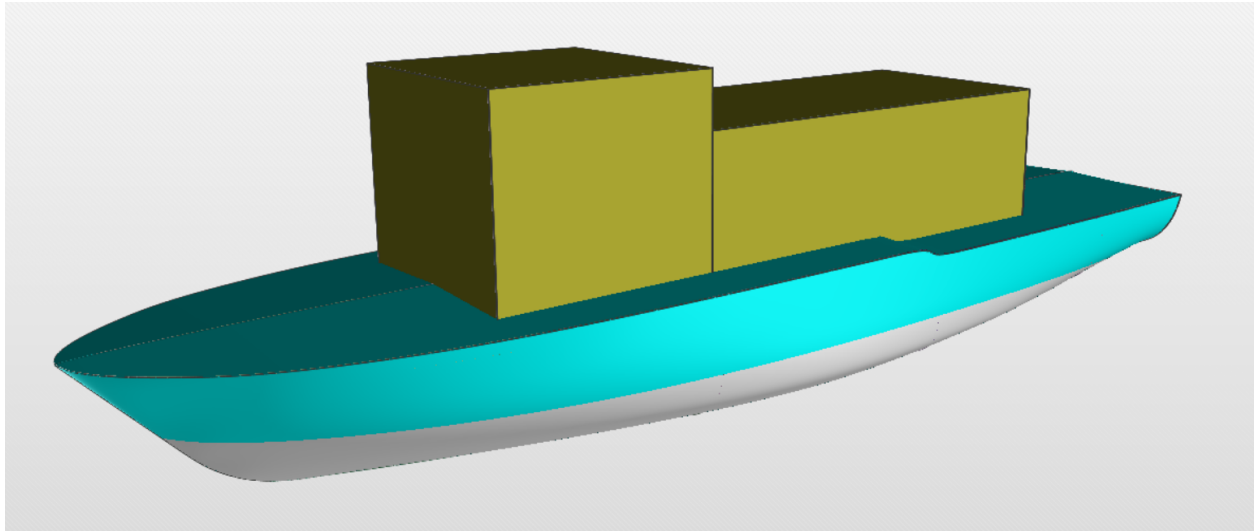


Figure 13: Isometric View of hull

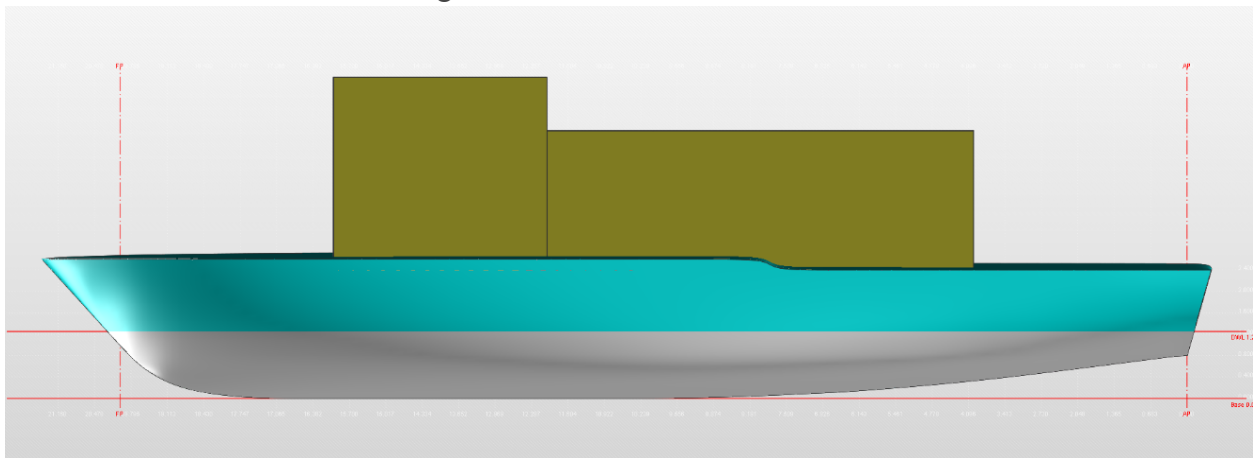


Figure 14: Side view of Hull

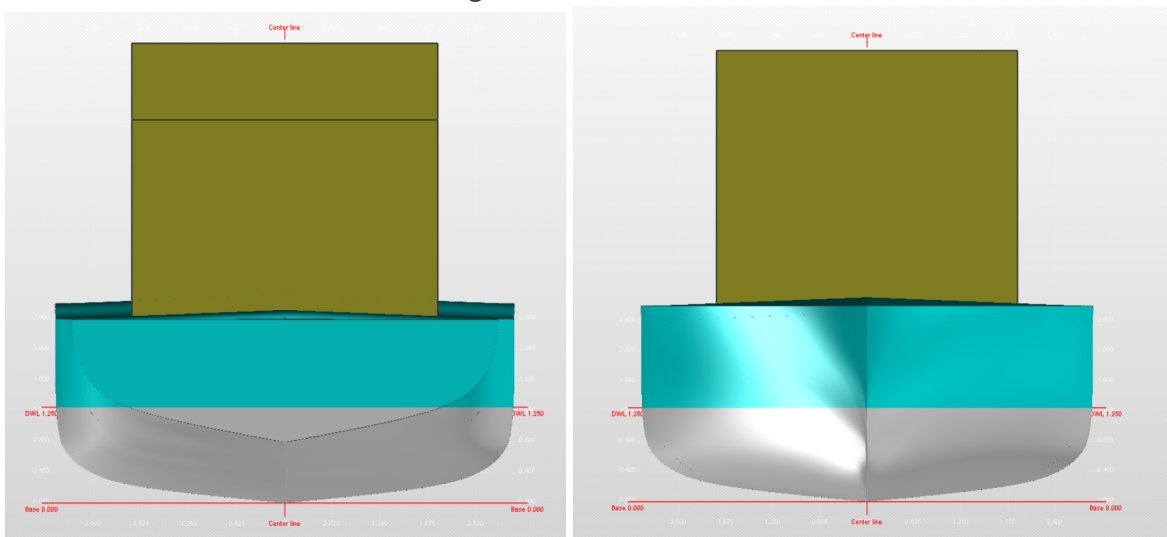


Figure 15: Fore and Aft view of Hull

7.3 Sectional Areas Curve

The sectional areas curve at the design draft of 1.25m was generated in DELFTship. It is shown in Figure 15.

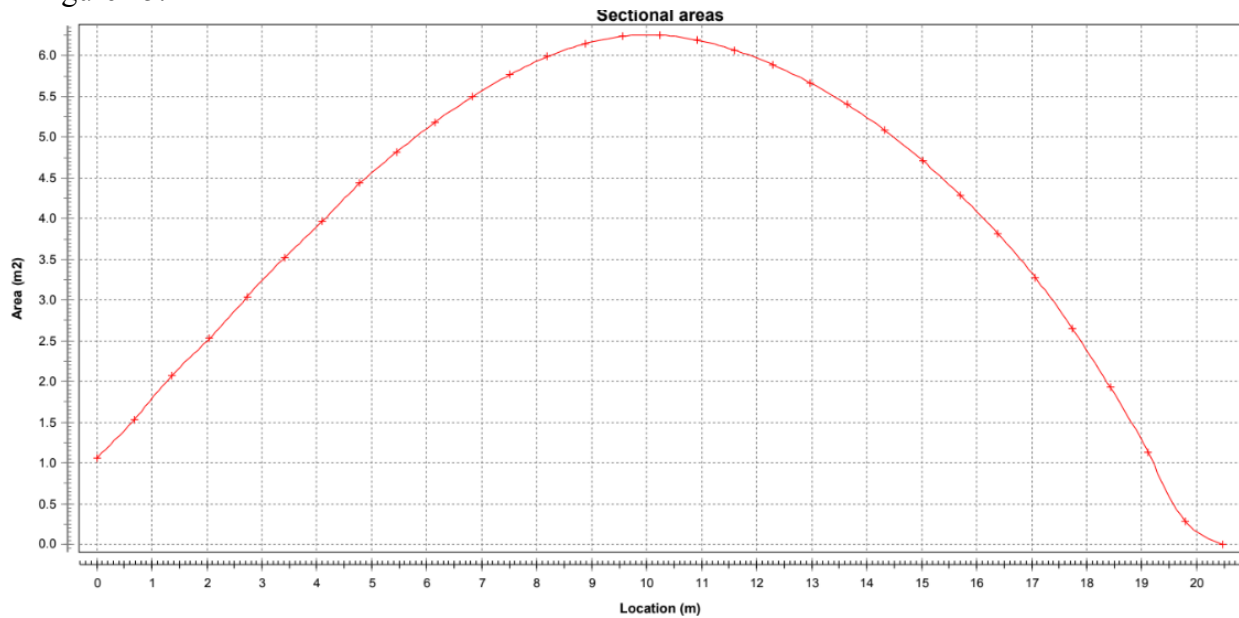


Figure 15: Curve of Areas

7.4 Hydrostatics

The curves of form were generated in DELFTship. They are shown in Figure 16, and the Cross Curves of stability are shown in Figure 17. These curves can be used to determine the change in draft as well the change in trim and heel when adding, removing, or relocating weights. A more detailed hydrostatics report is included in the Appendix.

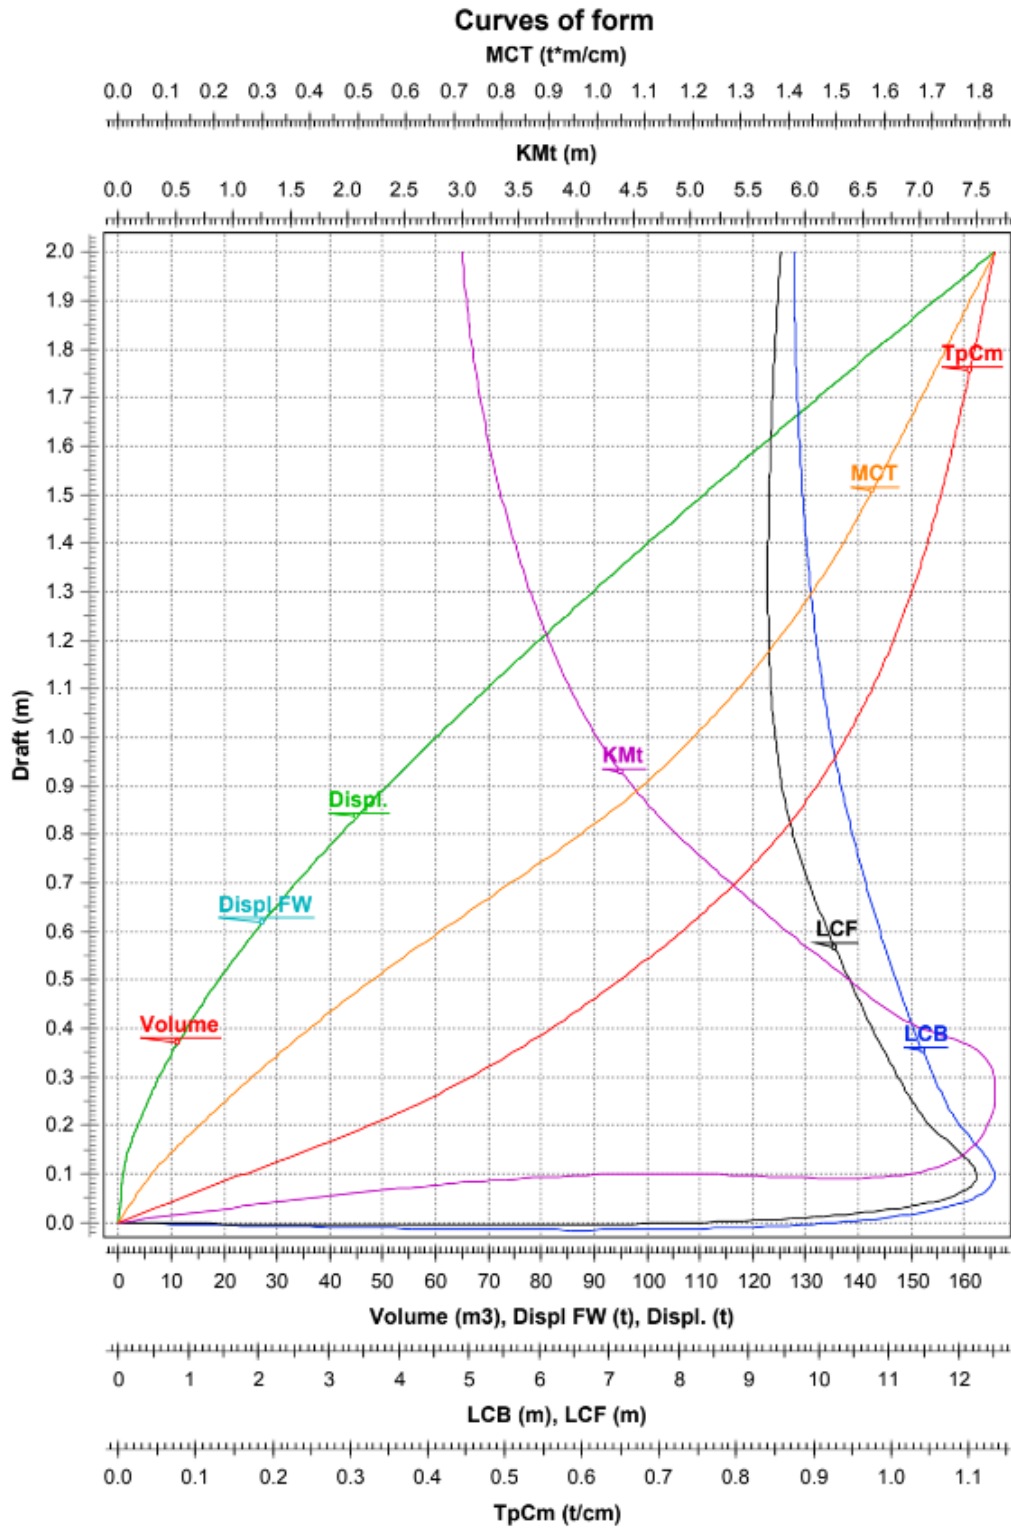


Figure 17: Curves of Form

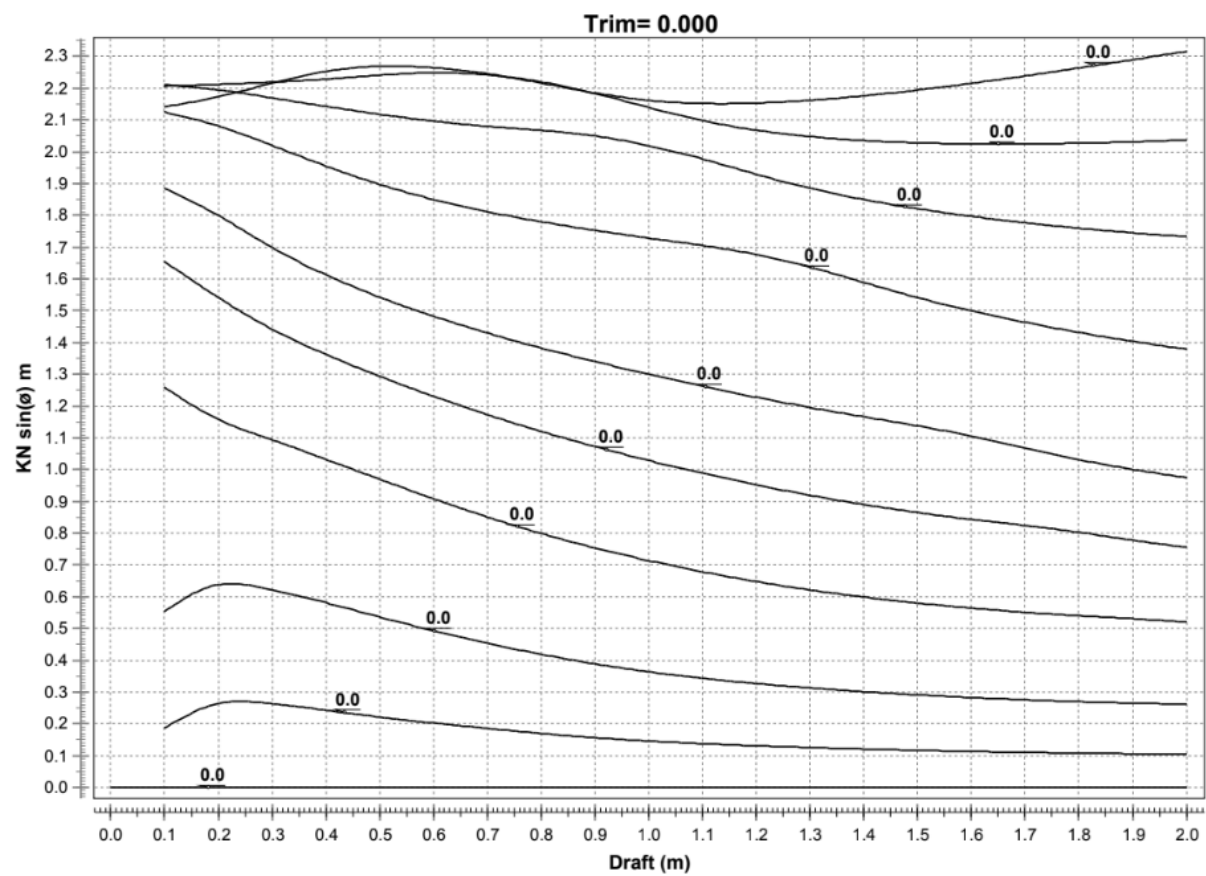


Figure 18: Cross Curves of Stability

7.3 Line Plans

The line plans of this hull are seen below. A large version of this figure is seen in the Appendix.

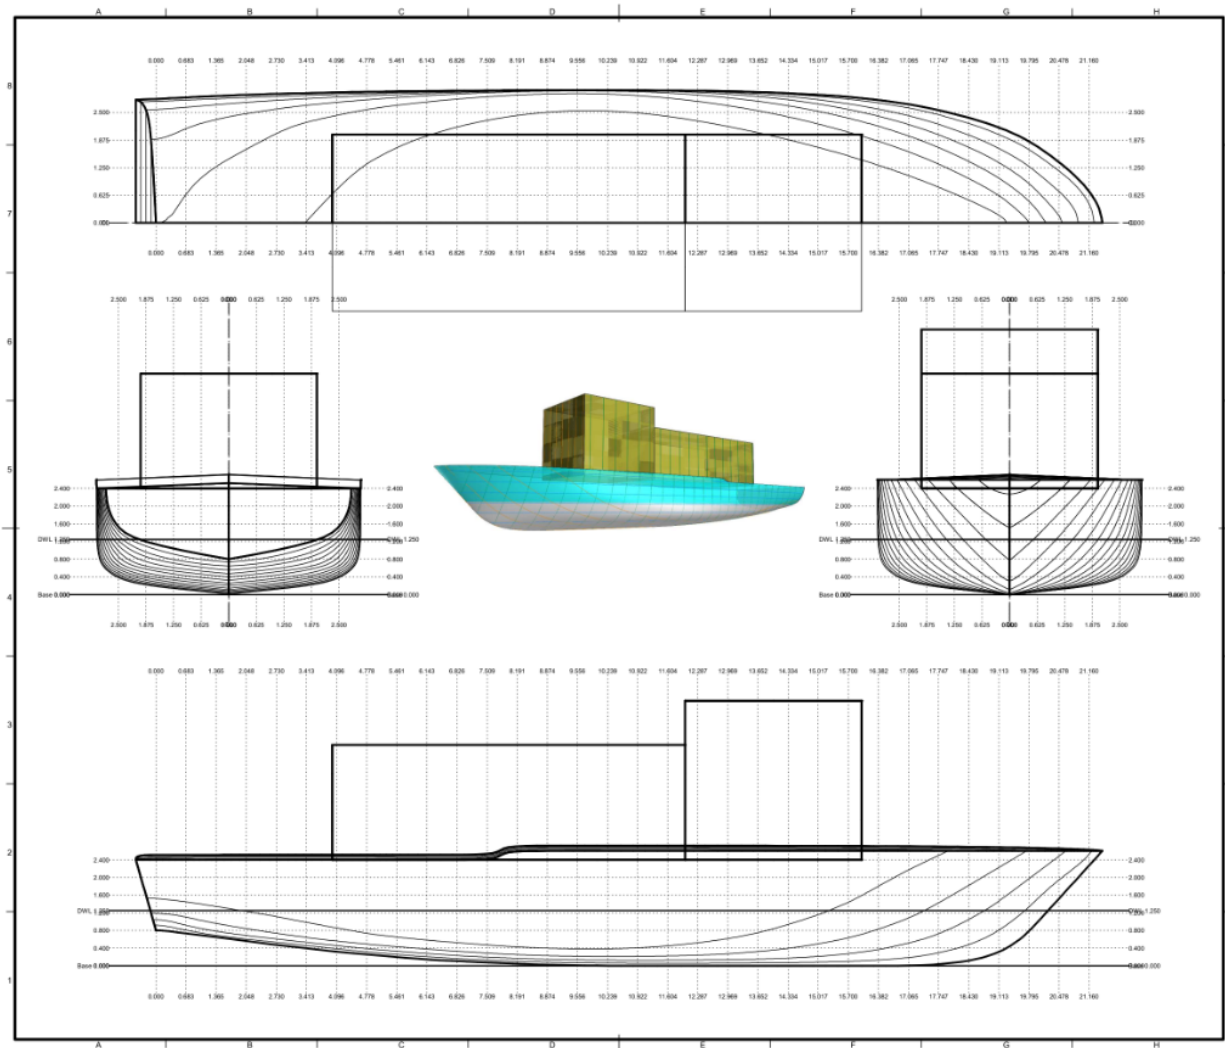


Figure 19: The Dalmatian Line Plans

7.5 Bonjean Plots

The bonjean plot values can be observed in the Appendix. Bonjean curve plots were not generated, but plot values are available in the Appendix. According to the Delftship user manual, Bonjean curves are mostly obsolete [12].

7.6 Resistance

The hydrodynamic resistance as a function of speed is plotted in DELFTShip.

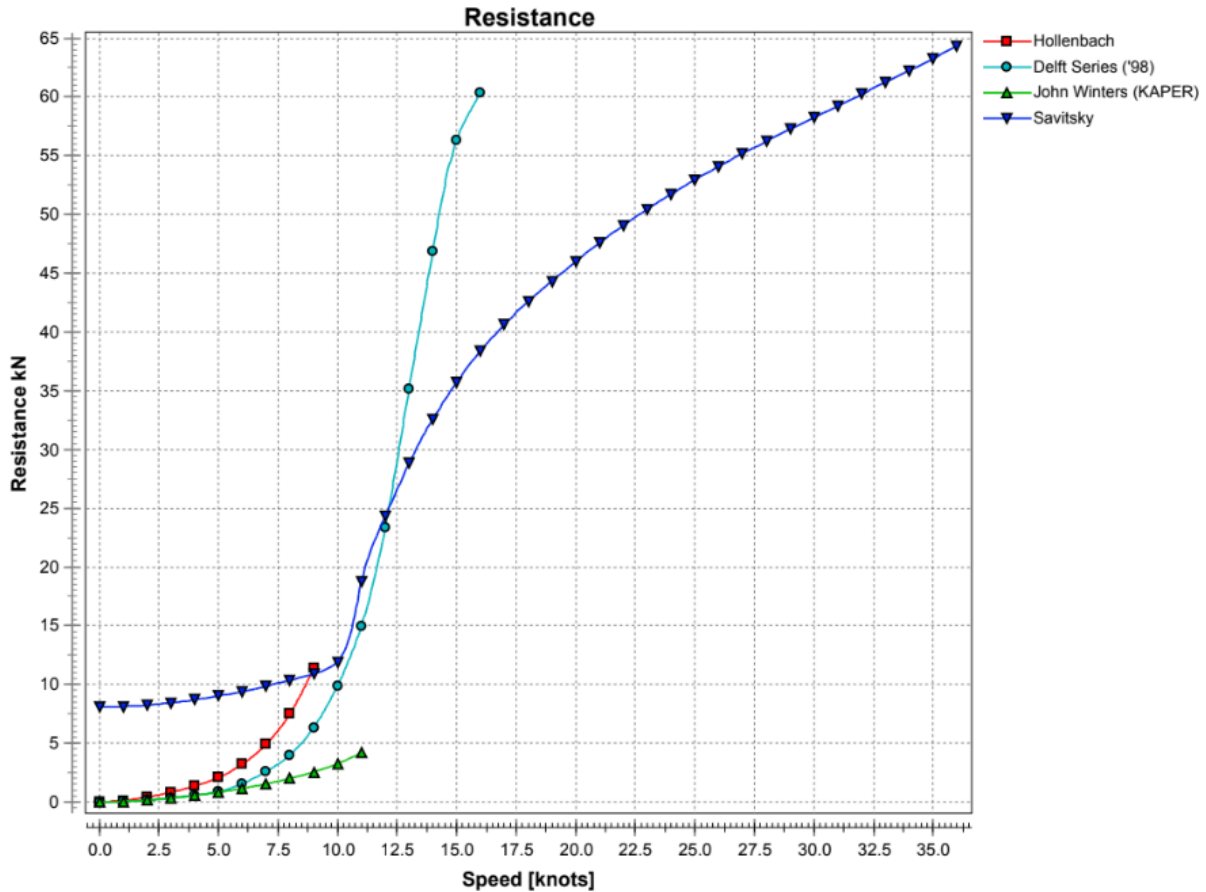


Figure 20: Hydrodynamic Resistance

8. Stability

The stability of the Dalmatian is compared against IMO MSC.267(85), the international code on intact stability, Part A, sections 2.2 - 2.3.

8.1 Floodable Lengths

The floodable length plot is shown in figure 20. Tabulated values are available in the Appendix. Examining the plot, the minimum floodable length occurs at the aft perpendicular, with a length of 4.25m moving forward from this position, the floodable length increases to 10.5m. These calculations assume a permeability of 0.95

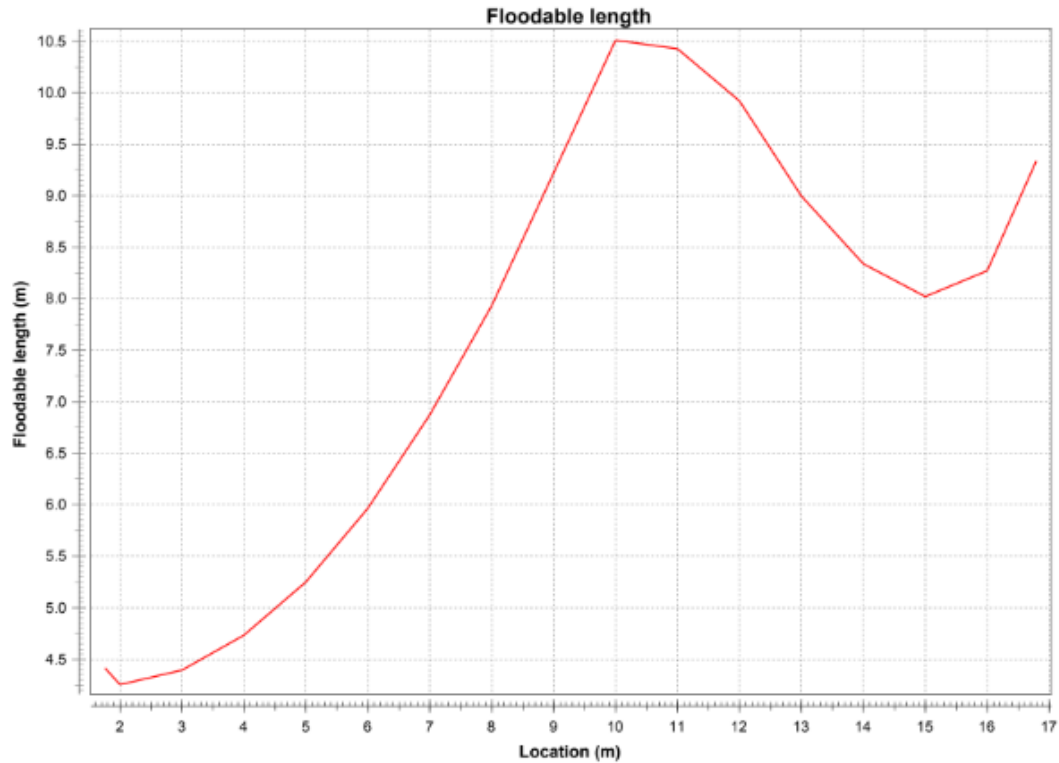


Figure 21: Floodable Length

8.2 Wind Heeling Moment

The wind heeling moment due to steady wind, as well as gusts, is calculated and superimposed on the stability curve in figure 23. The heeling moment is calculated using the wind silhouette (Figure 22). A more detailed report is available in the Appendix.

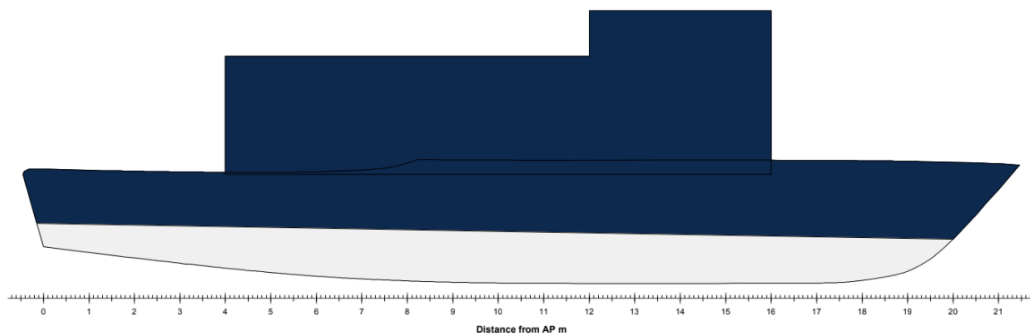


Figure 22: Wind Silhouette

Table 15: Wind Heeling Moment Parameters

Wind Speed	50.54 kn
Wind Pressure	51.37 kg/m ²
Wind Area	66.26 m ²
Steady Wind Lever	0.105 m
Wind Gust Lever	0.157 m

8.3 Stability Curve

The stability curve is plotted below. The vessel is seen to be stable up to a heeling angle of 60 degrees. According to the DELFTship stability report, the Dalmatian complies with all criterion set out by IMO MSC.267(85). The detailed criterion as well as the attained vs required values are available in the Appendix.

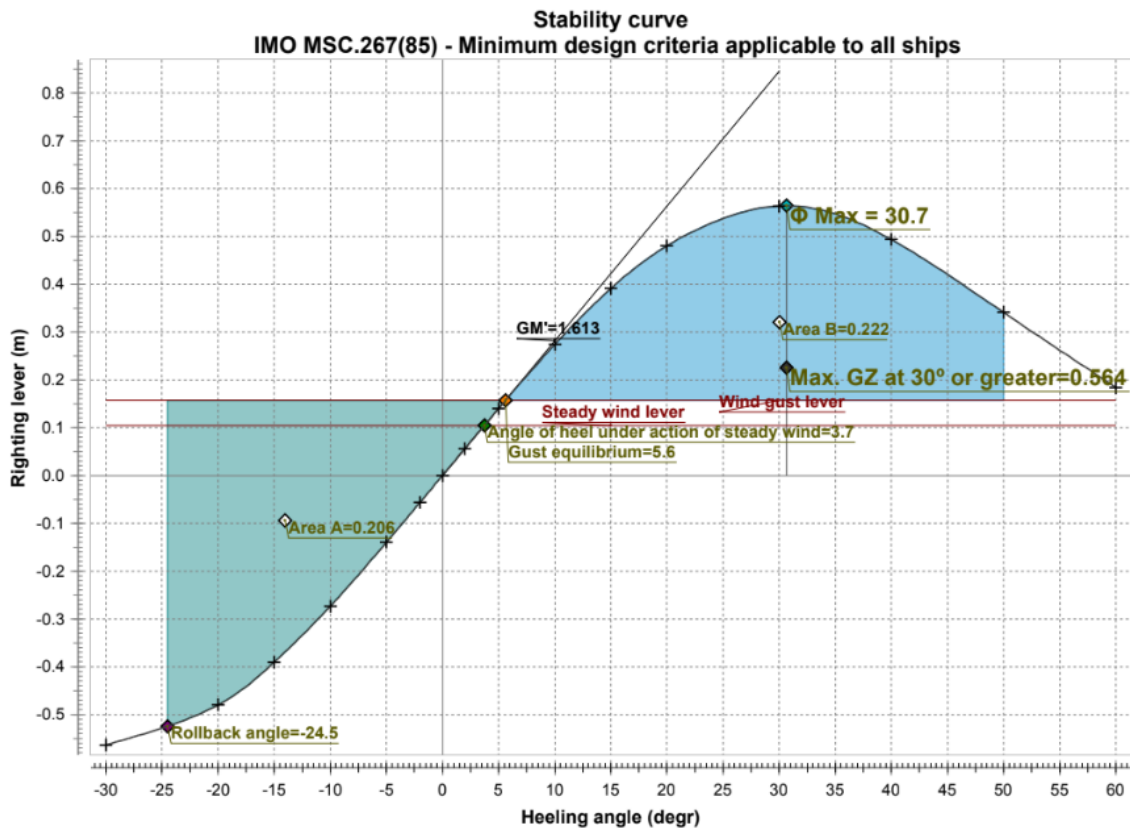


Figure 23: Stability Curve

9. Machinery Selection

Based on the previously outlined requirements, diesel engines, water-jet drives, and electrical generators are selected, to achieve a service speed of 28 knots, and top speed of 32 knots. Diesel machinery is selected to match the available infrastructure on Okanagan lake.

9.1 Diesel Engine

To match engine requirements, 4x Rolls Royce Diesel Engine MTU S60 are selected with a rated power up to 615kW, and a mass of 1841 kg each.



Figure 24: Rolls Royce MTU S60

9.2 Water-jet Drive

To match the propulsion requirements, 4x HamiltonJet HJ403 Water-Jet Drive is selected, with a max power output of 900kW, and mass of 638 kg each.

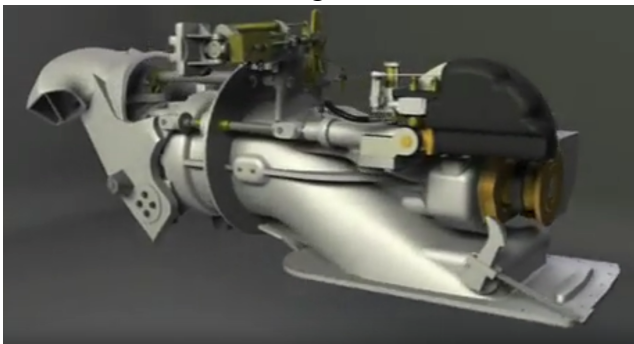


Figure 25: HamiltonJet HJ403 Water-jet drive

9.3 Electric Generator

To meet the electric generation requirements, 2x Onan MDKAF Diesel Gen-sets are selected with a power rating of 27.5 kW, and mass of 533 kg each.



Figure 26: Onan MDKAF Genset

9. Equipment Selection

This section details the selection of commercial equipment that will be integrated into the Dalmatian. Such as life saving equipment, rescue boat, and fire monitors that spray water.

9.1 Lifesaving Equipment

To assist in meeting the fast response requirement and increase the rescue capabilities of the vessel, a rescue boat (RIB) shall be included on board and hung from a Davit arm.

9.1.1 RIBO 340

A five person rescue boat, Survitec Zodiac RIBO 340, was selected due to its small size in order to fit on board the vessel [9]. The RIB is shown with its specification in Figure 26 below.



TECHNICAL DATA

RIBO 340*	CAPACITY	5 persons
	DIMENSIONS L x w	3.40 m x 1.71m
	WEIGHT	641.5kg (operational)
	TOWING	Bow towing points & V bridle / Aft towing V bridle / Transom towing points
	HOISTING	Bow / aft lifting points + sling Release hook SWL ≥ 750kg
	ENGINES	YAMAHA 25HP

Figure 27: RIBO 340

9.1.2 Davit Arm

A Davit arm specified for rescue boats was selected and sourced from Global Davit GmbH. It can withstand loads of over 15kN for the smallest model [10]. More than enough to hold the RIBO 340.

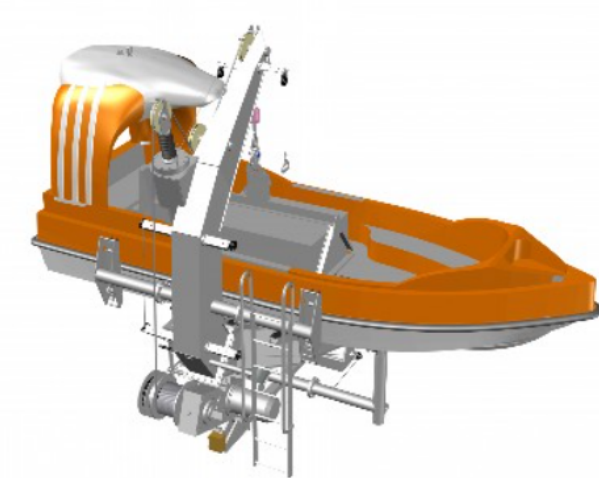


Figure 28: Global Davit GmbH Davit arm

9.2 Firefighting Equipment

In order to put out fires at range, monitors must be mounted on board the vessel. To meet the requirements of a Class A fireboat, the monitor(s) must have a FI-Fi capacity of over 18927L/min [1]. Instead of using dedicated pumps, the water jet propulsor pumps are used, diverting water to the firefighting monitors to reduce complexity and save weight and costs. The Streamaster 2 from Akron Brass meets flow requirements and is selected as the monitor used on board the Dalmatian. It is able to reach a flow of over 28769 L/min and weighs 28.2kg [11].



Figure 29: Streamaster 2 monitor

10. General Arrangements

The arrangement of equipment and compartments is similar to that of Robert Allen's J-2000. The propulsors are located at the aft in order to contact the water and move the ship forward. The engines are directly forward of the propulsors to reduce drive shaft length and complexity. At the center lower midship of the vessel are the gensets and bilge pumps, and they are straddled by fuel tanks and additional storage on either side. At the lower front of the ship is the crew quarters which includes PPE equipment, provision, and other furnishing. Below the lower deck is the ballast to control stability. Above the main deck are the aluminum superstructures, one structure for the wheelhouse and the other for equipment and other supplies. At the aft of the ship above the main deck would be the davit arm with the rescue boat overhanging vessel for quick deployment.

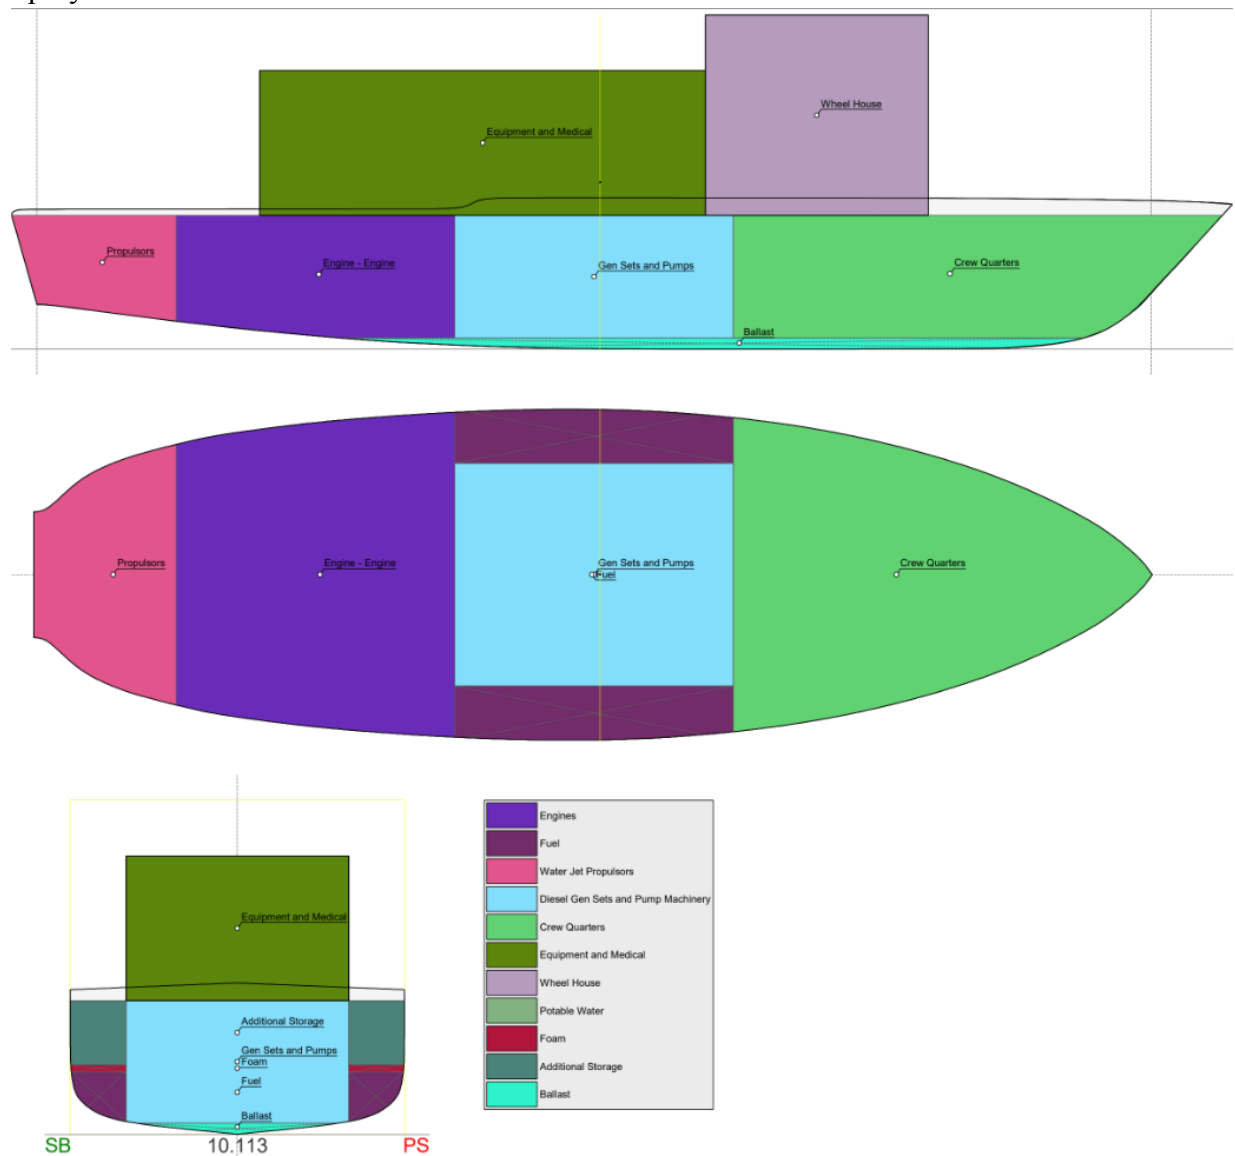


Figure 30: General arrangement of components on vessel

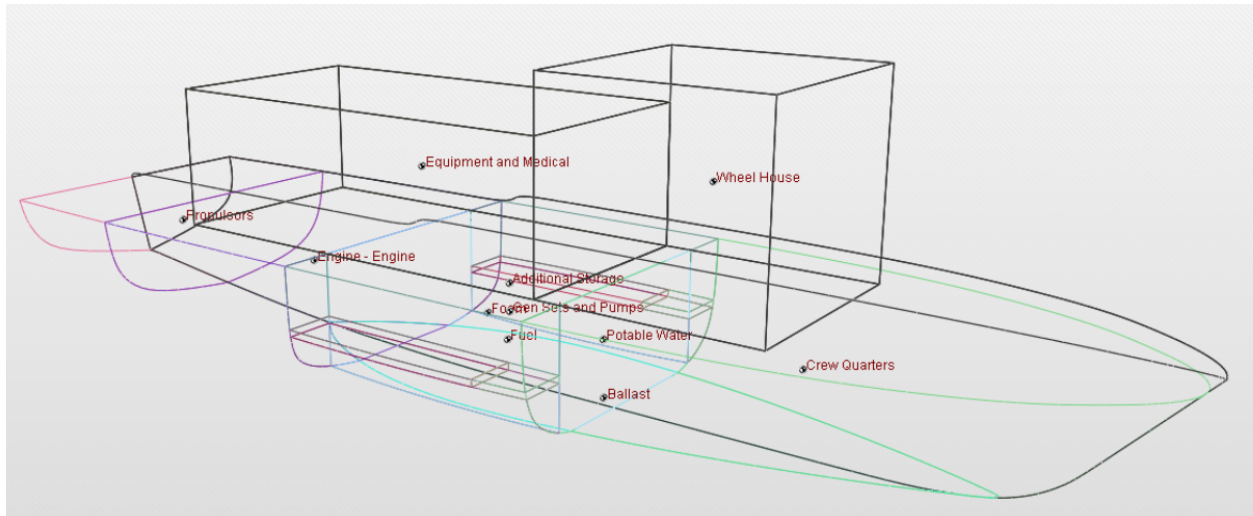


Figure 31: Alternate view of general arrangement

References

- [1] J. Ockerhausen, H. Stambaugh, and S. Kelly, 'Fireboats: Then and Now', FEMA, Technical Report 146, May 2003. [Online]. Available: <https://www.fireboat.org/FEMAFireboatsThenNowMay2003.pdf>
- [2] "Fireboats", ral.ca. [Online]. Available: <https://ral.ca/designs/fireboats/d>
- [3] William Lyon Mackenzie, freeshiplans.com. [Online] Available: <https://freeshiplans.com/free-model-ship-plans/other-ship-plans/william-lyon-mackenzie/>
- [4] J. G. Stockner and T. G. Northcote, 'Recent Limnological Studies of Okanagan Basin Lakes and their Contribution to Comprehensive Water Resource Planning', *J. Fish. Res. Bd. Can.*, vol. 31, no. 5, pp. 955–976, May 1974, doi: 10.1139/f74-111.
- [5] 'Canadian Climate Normals 1981-2010 Station Data - Climate - Environment and Climate Change Canada'. Accessed: Mar. 05, 2024. [Online]. Available: https://climate.weather.gc.ca/climate_normals/results_1981_2010_e.html?searchType=stnProv&lstProvince=BC&txtCentralLatMin=0&txtCentralLatSec=0&txtCentralLongMin=0&txtCentralLongSec=0&stnID=1001&dispBack=0
- [6] 'Ranger 2000 Class fireboat Independence for Philadelphia from Robert Allan Ltd.', Robert Allan Ltd. Accessed: Mar. 05, 2024. [Online]. Available: <https://ral.ca/2007/12/20/ranger-2000-class-fireboat-independence-philadelphia-robert-allan-ltd/>
- [7] A. Onorati, A. K. Agarwall, R. Payri, M. Gavaises, 'The future of ship engines: Renewable fuels and enabling technologies for decarbonization', *International Journal of Enginer Research*, August 2023. [Online] Available: https://www.researchgate.net/publication/373379477_The_future_of_ship_engines_Renewable_fuels_and_enabling_technologies_for_decarbonization
- [8] T. Lamb, Ed., "Chapter 12: Parametric Design," in *Ship Design and Construction*, 3rd ed., Society of Naval Architects & Engineers, 2004.
- [9] Survitec Zodiac, "RIBO – Rigid Inflatable Boat," [Brochure], Survitec Group, 2024. [Online]. Available: https://www.surviteczodiac.com/LRDocs/TDS_brochures/RIBO.pdf.
- [10] Global Davit GmbH, "Slewing Cranes," 2024. [Online]. Available: <https://www.global-davit.de/products/rescue-boat-handling/slewing-cranes/>.
- [11] "Akron Brass," StreamMaster II with AVM 2000 GPM, Akron Brass, 2024. [Online]. Available: https://www.akronbrass.com/monitors/stream-master-ii-with-avm#product_tabs_specifications.
- [12] Delftship User Manual, Delftship Maritime Software, 2023

Appendix: Delftship Outputs

This appendix contains all the reports generated by DELFTShip.
The contained reports are:

1. Design Hydrostatics report
2. Line planes
3. Hydrostatics Report
4. Cross Curves
5. Bonjean Curves
6. Tank Arrangements
7. Tank Capacities
8. Intact Stability Calculation
9. Floodable Length Calculation
10. Calculation of Wind Moments
11. Resistance Calculations

Design hydrostatics report

The Dalmation

Designer Colm Molder

Created by M. van Engeland

Comment

Filename The_Dalmation_V2.fbm

Design length	20.000 m	Midship location	10.000 m
Length of buoyancy model	21.916 m	Water density	1.0000
Design beam	6.000 m	Mean shell thickness	0.0125 m
Maximum beam	6.000 m	Appendage coefficient	1.0000
Design draft	1.250 m		

Volume properties		Waterplane properties	
Moulded volume	83.164 m ³	Length on waterline	20.358 m
Total displaced volume	84.654 m ³	Beam on waterline	5.982 m
Displacement	84.654 t	Entrance angle	55.5 degr
Block coefficient	0.5561	Waterplane area	101.56 m ²
Prismatic coefficient	0.6644	Waterplane coefficient	0.8339
Vert. prismatic coefficient	0.6551	Waterplane center of floatation	9.275 m
Wetted surface area	119.20 m ²	Transverse moment of inertia	240.894 m ⁴
Longitudinal center of buoyancy	9.922 m	Longitudinal moment of inertia	2777.809 m ⁴
Longitudinal center of buoyancy	-0.384 %		
Vertical center of buoyancy	0.775 m		
Total length of submerged body	20.358 m		
Total beam of submerged body	5.982 m		

Midship properties		Initial stability	
Midship section area	6.26 m ²	Transverse metacentric height	3.672 m
Midship coefficient	0.8369	Longitudinal metacentric height	34.177 m


Lateral plane	
Lateral area	21.58 m ²
Longitudinal center of lateral resistance	10.716 m
Vertical center of lateral resistance	0.691 m

The following layer properties are calculated for both sides of the ship


Location	Area	Thickness	Weight	LCG	TCG	VCG
	m ²	m	t	m	m	m
Hull	370.18	0.013	36.324	9.460	0.000 (CL)	1.751
Super Stucture	368.00	0.020	19.872	10.922	0.000 (CL)	4.170
Total	738.18		56.196	9.977	0.000 (CL)	2.606

Sectional areas									
Location	Area	Location	Area	Location	Area	Location	Area	Location	Area
m	m ²	m	m ²	m	m ²	m	m ²	m	m ²
0.000	1.07	4.778	4.43	9.556	6.24	14.334	5.08	19.113	1.13
0.683	1.54	5.461	4.82	10.239	6.25	15.017	4.71	19.795	0.28
1.365	2.07	6.143	5.18	10.922	6.19	15.700	4.29	20.478	0.00

Sectional areas									
Location	Area	Location	Area	Location	Area	Location	Area	Location	Area
m	m ²	m	m ²	m	m ²	m	m ²	m	m ²
2.048	2.53	6.826	5.49	11.604	6.07	16.382	3.82		
2.730	3.04	7.509	5.77	12.287	5.89	17.065	3.28		
3.413	3.52	8.191	5.99	12.969	5.67	17.747	2.64		
4.096	3.96	8.874	6.15	13.652	5.40	18.430	1.93		

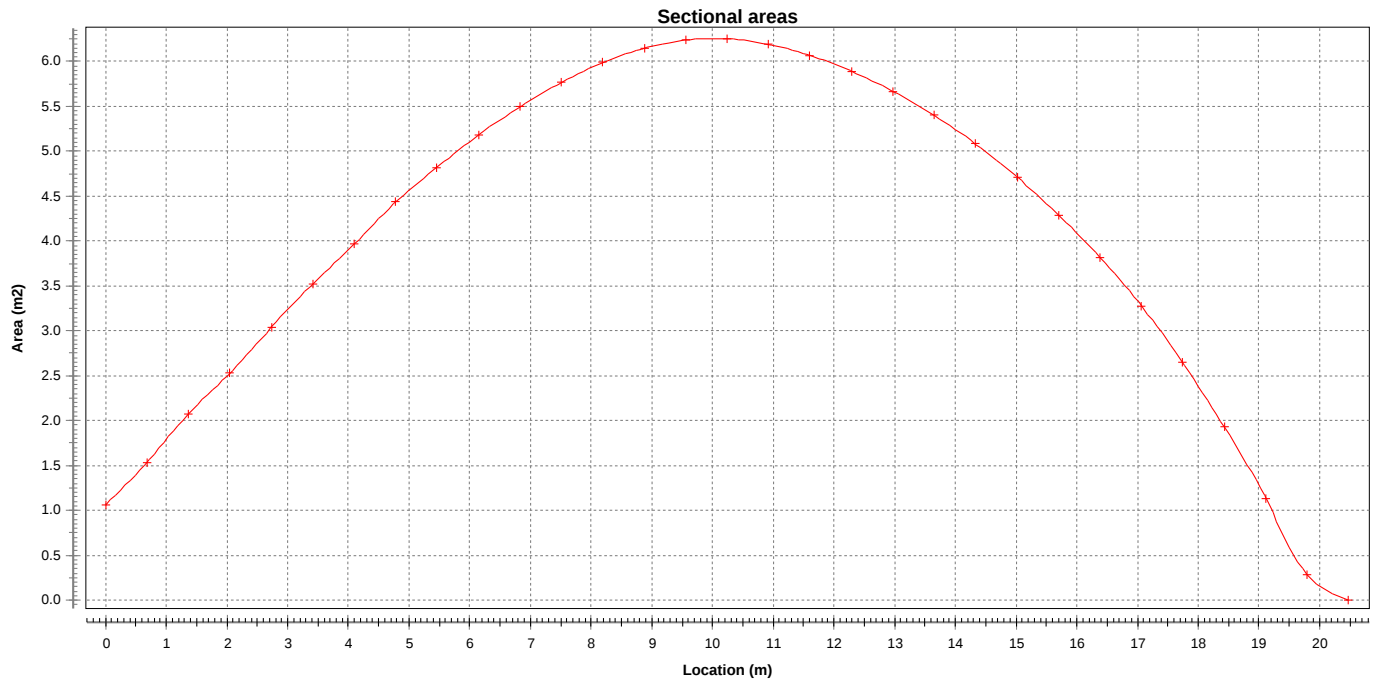

NOTE 1: Draft (and all other vertical heights) is measured from base Z=0.000
NOTE 2: All calculated coefficients based on actual dimensions of submerged body.

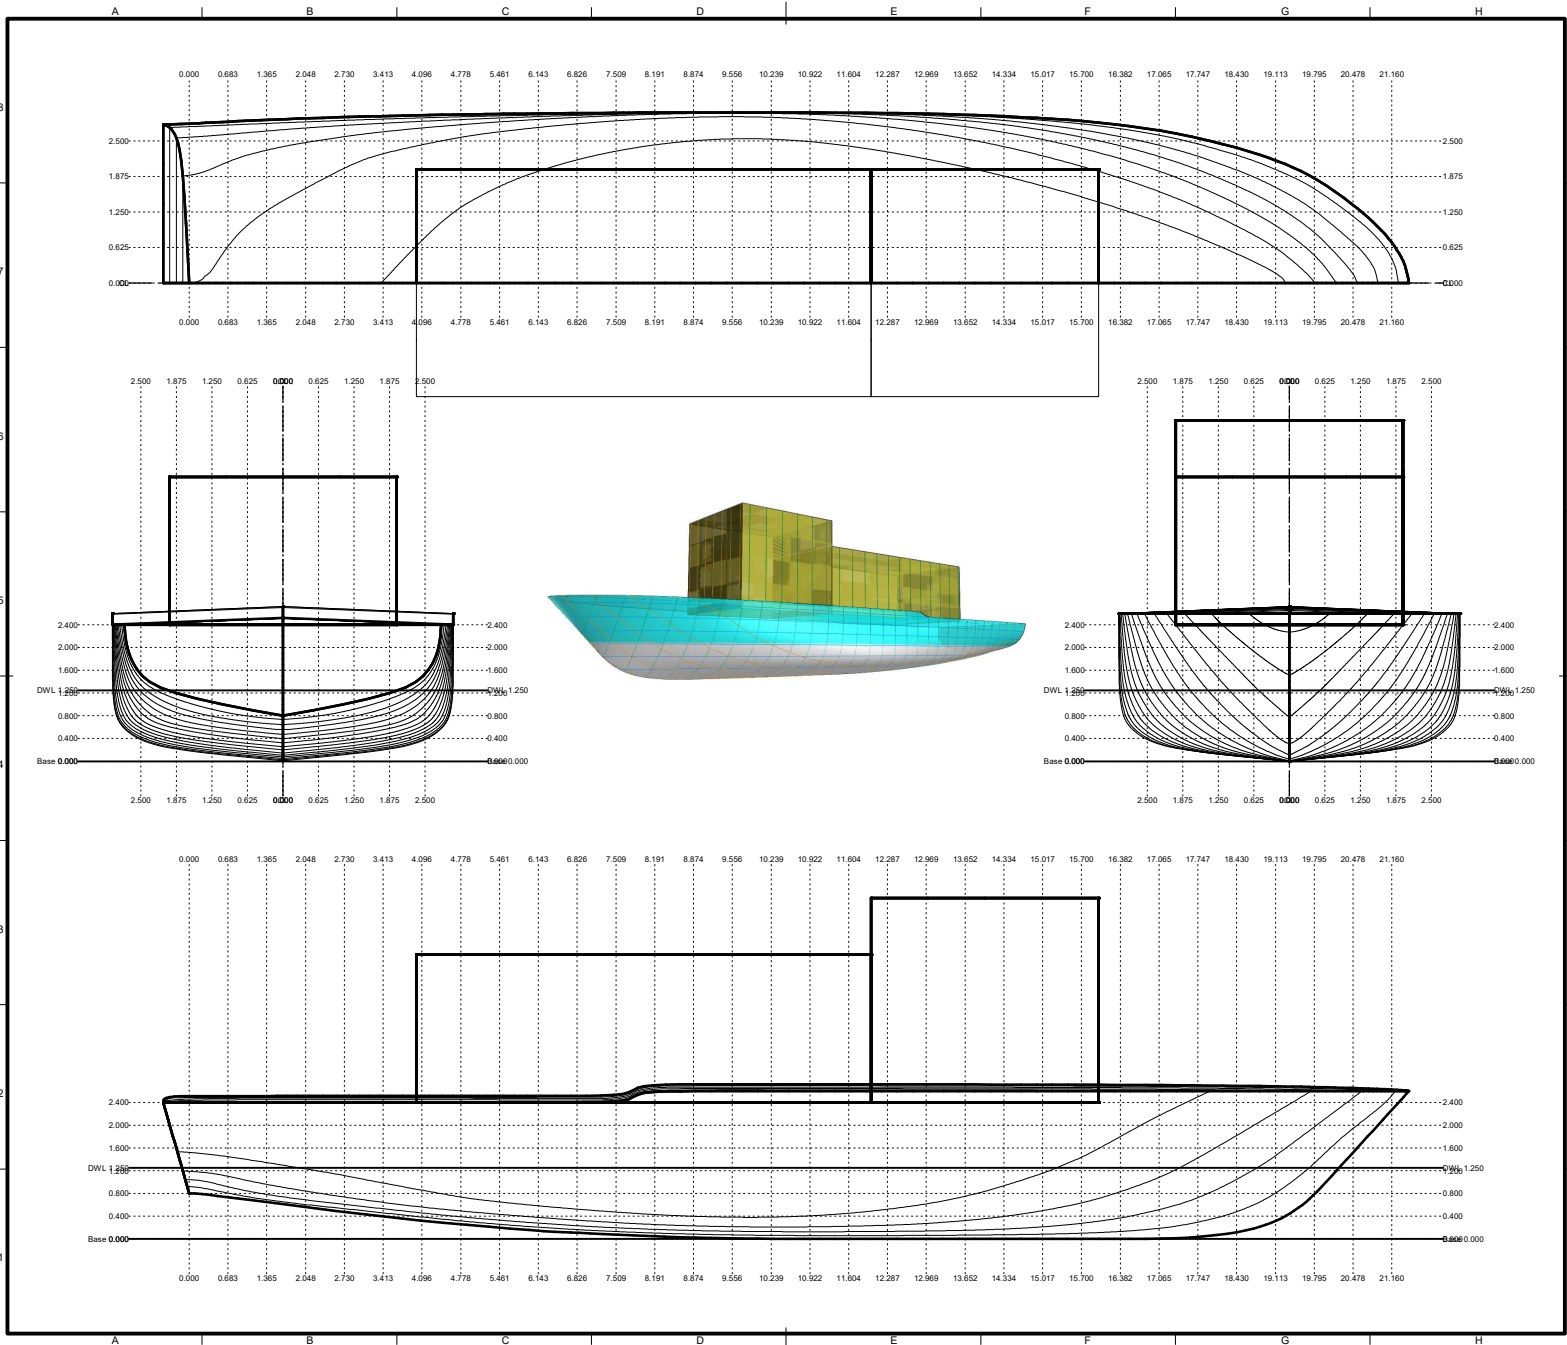


Hydrostatics

Water density : 1.0000

Mean shell thickness : 0.0125 m

Trim: 0.000 m

Draft m	Volume m ³	Displ FW t	Displ. t	LCB m	VCB m	TCB m	Aw m ²	LCF m	KMt m	KMI m	MCT t*m/cm	TpCm t/cm
0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.00	0.000
0.100	0.952	0.952	0.952	12.507	0.068	0.000	16.21	12.251	5.143	146.132	0.07	0.162
0.200	3.594	3.594	3.594	12.017	0.135	0.000	32.61	11.596	7.595	93.984	0.17	0.326
0.300	7.661	7.661	7.661	11.646	0.200	0.000	45.56	11.134	7.655	72.993	0.28	0.456
0.400	12.851	12.851	12.851	11.350	0.263	0.000	55.98	10.760	7.021	62.417	0.40	0.560
0.500	18.976	18.976	18.976	11.100	0.325	0.000	64.87	10.438	6.386	56.056	0.53	0.649
0.600	25.938	25.938	25.938	10.875	0.387	0.000	72.92	10.127	5.843	52.247	0.67	0.729
0.700	33.637	33.637	33.637	10.669	0.449	0.000	79.87	9.861	5.349	49.158	0.82	0.799
0.800	41.966	41.966	41.966	10.481	0.510	0.000	85.69	9.631	4.876	46.521	0.97	0.857
0.900	50.816	50.816	50.816	10.315	0.570	0.000	90.43	9.471	4.490	43.641	1.09	0.904
1.000	60.079	60.079	60.079	10.175	0.629	0.000	94.28	9.376	4.185	40.606	1.20	0.943
1.100	69.690	69.690	69.690	10.059	0.688	0.000	97.56	9.316	3.948	37.846	1.29	0.976
1.200	79.601	79.601	79.601	9.963	0.746	0.000	100.38	9.281	3.759	35.361	1.38	1.004
1.300	89.767	89.767	89.767	9.884	0.804	0.000	102.74	9.269	3.598	33.105	1.45	1.027
1.400	100.150	100.150	100.150	9.820	0.861	0.000	104.75	9.272	3.460	31.092	1.51	1.047
1.500	110.717	110.717	110.717	9.768	0.918	0.000	106.46	9.287	3.342	29.295	1.57	1.065
1.600	121.446	121.446	121.446	9.726	0.974	0.000	108.03	9.309	3.243	27.735	1.62	1.080
1.700	132.323	132.323	132.323	9.693	1.030	0.000	109.46	9.340	3.160	26.377	1.68	1.095
1.800	143.339	143.339	143.339	9.667	1.086	0.000	110.84	9.373	3.094	25.201	1.73	1.108
1.900	154.490	154.490	154.490	9.647	1.141	0.000	112.14	9.411	3.040	24.175	1.78	1.121
2.000	165.769	165.769	165.769	9.632	1.197	0.000	113.43	9.453	2.998	23.278	1.83	1.134

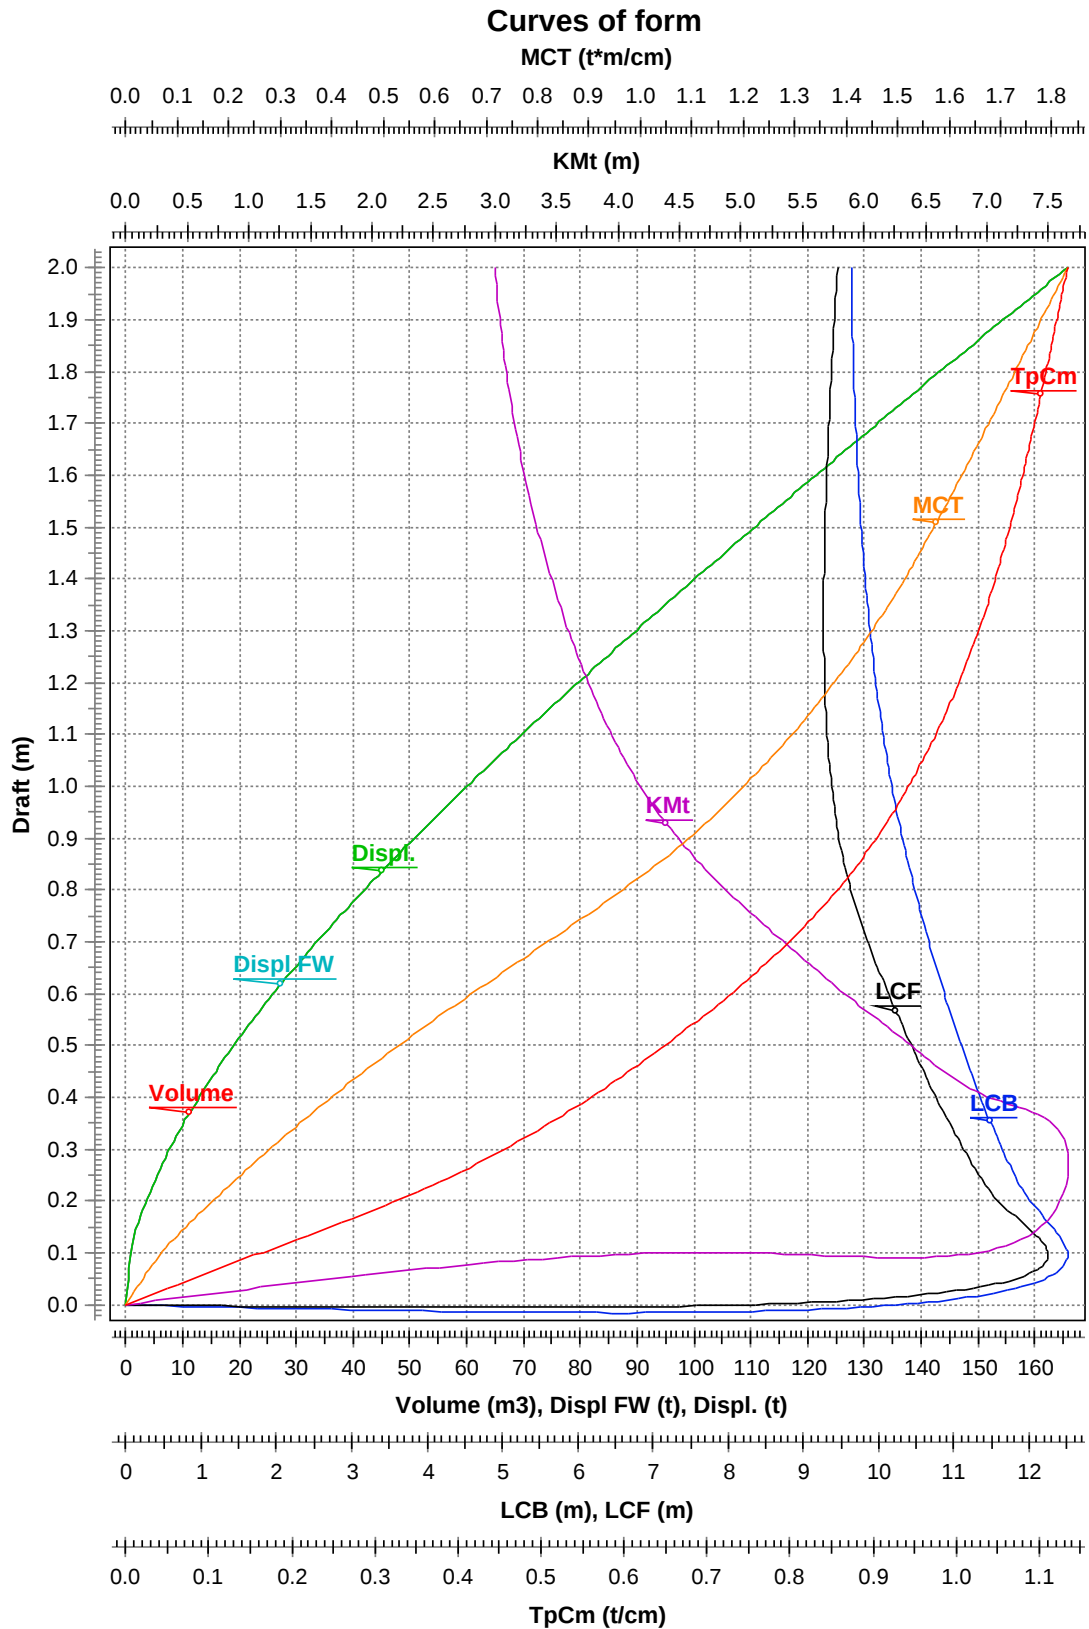

NOTE 1: Draft (and all other vertical heights) is measured from base $Z=0.000$

NOTE 2: All calculated coefficients based on actual dimensions of submerged body.


Nomenclature

Draft	<i>Moulded draft, measured from baseline</i>
Volume	<i>Total displaced volume</i>
Displ FW	<i>Displacement fresh water</i>
Displ.	<i>Displacement</i>
LCB	<i>Longitudinal center of buoyancy, measured from the aft perpendicular at $X=0.0$</i>
VCB	<i>Vertical center of buoyancy</i>
TCB	<i>Transverse center of buoyancy</i>
Aw	<i>Waterplane area</i>
LCF	<i>Waterplane center of floatation, measured from the aft perpendicular at $X=0.0$</i>
KMt	<i>Transverse metacentric height</i>
KMI	<i>Longitudinal metacentric height</i>
MCT	<i>Moment to change trim one unit</i>
TpCm	<i>Weight to change the immersion with one unit</i>

Cross curves

Trim = 0.000

Draft m	Displ. t	0.0 degr	2.0 degr	5.0 degr	10.0 degr	15.0 degr	20.0 degr	30.0 degr	40.0 degr	50.0 degr	60.0 degr
0.000	0.000	<->	<->	<->	<->	<->	<->	<->	<->	<->	60.0
0.100	0.952	0.000	0.187	0.553	1.259	1.655	1.885	2.125	2.211	2.206	2.142
0.200	3.594	0.000	0.264	0.638	1.158	1.542	1.799	2.081	2.195	2.213	2.173
0.300	7.661	0.000	0.264	0.622	1.094	1.442	1.699	2.020	2.170	2.219	2.217
0.400	12.851	0.000	0.243	0.581	1.032	1.363	1.613	1.955	2.143	2.228	2.253
0.500	18.976	0.000	0.221	0.536	0.970	1.293	1.542	1.897	2.118	2.241	2.269
0.600	25.938	0.000	0.203	0.493	0.908	1.231	1.483	1.850	2.097	2.249	2.264
0.700	33.637	0.000	0.186	0.454	0.851	1.173	1.430	1.811	2.080	2.242	2.246
0.800	41.966	0.000	0.170	0.419	0.799	1.120	1.383	1.780	2.068	2.220	2.216
0.900	50.816	0.000	0.157	0.389	0.753	1.073	1.340	1.753	2.050	2.184	2.185
1.000	60.079	0.000	0.146	0.364	0.713	1.029	1.300	1.729	2.019	2.140	2.162
1.100	69.690	0.000	0.138	0.343	0.678	0.989	1.263	1.705	1.978	2.098	2.152
1.200	79.601	0.000	0.131	0.327	0.648	0.952	1.228	1.677	1.929	2.068	2.153
1.300	89.767	0.000	0.125	0.313	0.621	0.919	1.196	1.637	1.885	2.048	2.162
1.400	100.150	0.000	0.121	0.301	0.599	0.890	1.166	1.589	1.850	2.036	2.176
1.500	110.717	0.000	0.117	0.291	0.580	0.865	1.137	1.541	1.821	2.028	2.194
1.600	121.446	0.000	0.113	0.283	0.564	0.843	1.106	1.500	1.797	2.025	2.216
1.700	132.323	0.000	0.110	0.276	0.551	0.824	1.068	1.464	1.777	2.025	2.239
1.800	143.339	0.000	0.108	0.270	0.540	0.803	1.031	1.432	1.760	2.027	2.264
1.900	154.490	0.000	0.106	0.265	0.531	0.778	1.001	1.404	1.745	2.031	2.290
2.000	165.769	0.000	0.105	0.262	0.520	0.755	0.975	1.379	1.733	2.037	2.316

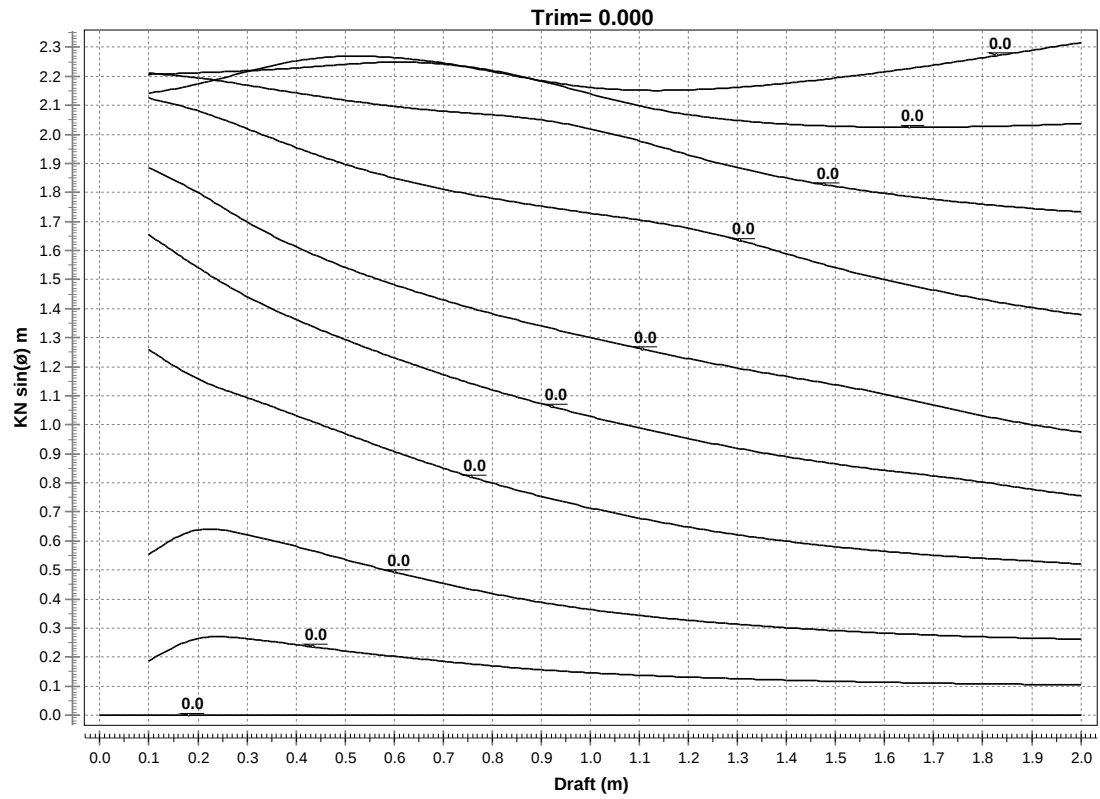

Bonjean curves

Height	Area	VCG	Height	Area	VCG	Height	Area	VCG
m	m ²	m	m	m ²	m	m	m ²	m
Station 0.000								
0.800	0.00	0.000	0.900	0.07	0.867	1.000	0.24	0.933
1.100	0.51	0.999	1.200	0.86	1.063	1.300	1.28	1.126
1.400	1.74	1.187	1.500	2.23	1.246	1.600	2.74	1.303
1.700	3.26	1.360	1.800	3.79	1.416	1.900	4.33	1.471
2.000	4.88	1.525						
Station 0.683								
0.734	0.00	0.000	0.800	0.06	0.777	0.900	0.26	0.839
1.000	0.55	0.900	1.100	0.91	0.961	1.200	1.31	1.022
1.300	1.77	1.082	1.400	2.25	1.141	1.500	2.75	1.198
1.600	3.27	1.255	1.700	3.81	1.311	1.800	4.35	1.367
1.900	4.90	1.421	2.000	5.45	1.476			
Station 1.365								
0.646	0.00	0.000	0.700	0.06	0.680	0.800	0.27	0.743
0.900	0.58	0.804	1.000	0.96	0.864	1.100	1.38	0.922
1.200	1.83	0.981	1.300	2.32	1.038	1.400	2.82	1.095
1.500	3.35	1.151	1.600	3.88	1.207	1.700	4.42	1.262
1.800	4.97	1.316	1.900	5.53	1.371	2.000	6.09	1.425
Station 2.048								
0.559	0.00	0.000	0.600	0.04	0.584	0.700	0.23	0.648
0.800	0.53	0.711	0.900	0.90	0.771	1.000	1.33	0.831
1.100	1.79	0.889	1.200	2.28	0.946	1.300	2.78	1.002
1.400	3.31	1.058	1.500	3.84	1.113	1.600	4.38	1.168
1.700	4.94	1.223	1.800	5.49	1.277	1.900	6.06	1.331
2.000	6.62	1.384						
Station 2.730								
0.476	0.00	0.000	0.500	0.02	0.492	0.600	0.19	0.556
0.700	0.49	0.619	0.800	0.88	0.679	0.900	1.31	0.737
1.000	1.78	0.795	1.100	2.27	0.851	1.200	2.78	0.907
1.300	3.30	0.963	1.400	3.84	1.018	1.500	4.39	1.072
1.600	4.94	1.126	1.700	5.50	1.180	1.800	6.07	1.234
1.900	6.63	1.287	2.000	7.21	1.340			
Station 3.413								
0.396	0.00	0.000	0.400	0.00	0.399	0.500	0.13	0.465
0.600	0.41	0.530	0.700	0.80	0.592	0.800	1.24	0.650
0.900	1.71	0.707	1.000	2.21	0.763	1.100	2.72	0.818
1.200	3.25	0.873	1.300	3.79	0.928	1.400	4.34	0.982
1.500	4.90	1.036	1.600	5.46	1.089	1.700	6.03	1.142
1.800	6.60	1.196	1.900	7.18	1.248	2.000	7.75	1.301
Station 4.096								

Height	Area	VCG	Height	Area	VCG	Height	Area	VCG
m	m ²	m	m	m ²	m	m	m ²	m
0.322	0.00	0.000	0.400	0.08	0.374	0.500	0.32	0.438
0.600	0.68	0.501	0.700	1.12	0.562	0.800	1.59	0.620
0.900	2.09	0.677	1.000	2.61	0.732	1.100	3.14	0.787
1.200	3.69	0.841	1.300	4.24	0.895	1.400	4.80	0.949
1.500	5.36	1.002	1.600	5.93	1.055	1.700	6.51	1.108
1.800	7.08	1.161	1.900	7.66	1.213	2.000	8.25	1.266

Station 4.778

0.257	0.00	0.000	0.300	0.03	0.286	0.400	0.24	0.351
0.500	0.58	0.413	0.600	1.00	0.474	0.700	1.48	0.533
0.800	1.99	0.590	0.900	2.51	0.645	1.000	3.05	0.700
1.100	3.60	0.754	1.200	4.15	0.808	1.300	4.72	0.861
1.400	5.28	0.915	1.500	5.86	0.967	1.600	6.43	1.020
1.700	7.01	1.073	1.800	7.59	1.125	1.900	8.18	1.177
2.000	8.76	1.229						

Station 5.461

0.198	0.00	0.000	0.200	0.00	0.199	0.300	0.13	0.266
0.400	0.42	0.330	0.500	0.82	0.392	0.600	1.28	0.452
0.700	1.79	0.509	0.800	2.31	0.566	0.900	2.86	0.621
1.000	3.41	0.675	1.100	3.97	0.729	1.200	4.54	0.782
1.300	5.11	0.835	1.400	5.68	0.888	1.500	6.26	0.940
1.600	6.85	0.993	1.700	7.43	1.045	1.800	8.02	1.097
1.900	8.60	1.149	2.000	9.19	1.200			

Station 6.143

0.146	0.00	0.000	0.200	0.05	0.182	0.300	0.27	0.247
0.400	0.62	0.310	0.500	1.06	0.371	0.600	1.56	0.429
0.700	2.08	0.486	0.800	2.62	0.542	0.900	3.18	0.597
1.000	3.74	0.651	1.100	4.32	0.705	1.200	4.89	0.758
1.300	5.47	0.811	1.400	6.05	0.863	1.500	6.64	0.915
1.600	7.23	0.967	1.700	7.82	1.019	1.800	8.41	1.071
1.900	9.00	1.123	2.000	9.59	1.174			

Station 6.826

0.107	0.00	0.000	0.200	0.12	0.169	0.300	0.41	0.233
0.400	0.81	0.295	0.500	1.28	0.354	0.600	1.80	0.412
0.700	2.34	0.468	0.800	2.90	0.524	0.900	3.46	0.578
1.000	4.04	0.632	1.100	4.62	0.685	1.200	5.20	0.738
1.300	5.79	0.791	1.400	6.38	0.843	1.500	6.97	0.895
1.600	7.56	0.946	1.700	8.15	0.998	1.800	8.75	1.050
1.900	9.34	1.101	2.000	9.94	1.152			

Station 7.509

0.075	0.00	0.000	0.100	0.01	0.092	0.200	0.20	0.158
0.300	0.54	0.221	0.400	0.98	0.282	0.500	1.48	0.340
0.600	2.01	0.397	0.700	2.56	0.453	0.800	3.13	0.508
0.900	3.71	0.562	1.000	4.29	0.616	1.100	4.88	0.669
1.200	5.47	0.721	1.300	6.06	0.773	1.400	6.66	0.825

Height	Area	VCG	Height	Area	VCG	Height	Area	VCG
m	m ²	m	m	m ²	m	m	m ²	m
1.500	7.25	0.877	1.600	7.85	0.929	1.700	8.45	0.980
1.800	9.04	1.031	1.900	9.64	1.082	2.000	10.24	1.133

Station 8.191

0.046	0.00	0.000	0.100	0.05	0.082	0.200	0.28	0.148
0.300	0.67	0.211	0.400	1.13	0.271	0.500	1.64	0.329
0.600	2.19	0.385	0.700	2.75	0.441	0.800	3.33	0.495
0.900	3.91	0.549	1.000	4.50	0.602	1.100	5.10	0.655
1.200	5.69	0.708	1.300	6.29	0.760	1.400	6.89	0.811
1.500	7.48	0.863	1.600	8.08	0.914	1.700	8.68	0.965
1.800	9.28	1.016	1.900	9.88	1.067	2.000	10.48	1.118

Station 8.874

0.025	0.00	0.000	0.100	0.08	0.075	0.200	0.35	0.140
0.300	0.76	0.203	0.400	1.24	0.263	0.500	1.77	0.320
0.600	2.32	0.376	0.700	2.89	0.432	0.800	3.47	0.486
0.900	4.06	0.540	1.000	4.65	0.593	1.100	5.25	0.645
1.200	5.85	0.697	1.300	6.45	0.749	1.400	7.05	0.801
1.500	7.65	0.852	1.600	8.25	0.904	1.700	8.85	0.955
1.800	9.45	1.006	1.900	10.06	1.056	2.000	10.66	1.107

Station 9.556

0.011	0.00	0.000	0.100	0.10	0.070	0.200	0.40	0.136
0.300	0.82	0.198	0.400	1.31	0.257	0.500	1.84	0.314
0.600	2.40	0.370	0.700	2.97	0.425	0.800	3.56	0.480
0.900	4.15	0.533	1.000	4.74	0.586	1.100	5.34	0.639
1.200	5.94	0.691	1.300	6.54	0.743	1.400	7.14	0.794
1.500	7.74	0.846	1.600	8.34	0.897	1.700	8.95	0.948
1.800	9.55	0.999	1.900	10.15	1.050	2.000	10.75	1.101

Station 10.239

0.003	0.00	0.000	0.100	0.12	0.068	0.200	0.43	0.133
0.300	0.85	0.195	0.400	1.34	0.254	0.500	1.87	0.311
0.600	2.42	0.367	0.700	3.00	0.422	0.800	3.58	0.476
0.900	4.17	0.530	1.000	4.76	0.583	1.100	5.36	0.636
1.200	5.95	0.688	1.300	6.55	0.740	1.400	7.15	0.792
1.500	7.76	0.843	1.600	8.36	0.894	1.700	8.96	0.946
1.800	9.56	0.997	1.900	10.17	1.047	2.000	10.77	1.098

Station 10.922

0.001	0.00	0.000	0.100	0.13	0.067	0.200	0.43	0.132
0.300	0.85	0.193	0.400	1.34	0.252	0.500	1.85	0.309
0.600	2.40	0.365	0.700	2.96	0.420	0.800	3.54	0.475
0.900	4.12	0.529	1.000	4.71	0.582	1.100	5.30	0.635
1.200	5.89	0.688	1.300	6.49	0.740	1.400	7.09	0.792
1.500	7.69	0.844	1.600	8.29	0.895	1.700	8.89	0.947
1.800	9.49	0.998	1.900	10.09	1.049	2.000	10.70	1.100

Height	Area	VCG	Height	Area	VCG	Height	Area	VCG
m	m ²	m	m	m ²	m	m	m ²	m
Station 11.604								
0.000	0.00	0.000	0.100	0.13	0.067	0.200	0.43	0.131
0.300	0.84	0.193	0.400	1.30	0.251	0.500	1.81	0.308
0.600	2.34	0.365	0.700	2.89	0.420	0.800	3.45	0.475
0.900	4.02	0.529	1.000	4.60	0.583	1.100	5.18	0.636
1.200	5.77	0.689	1.300	6.36	0.742	1.400	6.96	0.794
1.500	7.55	0.846	1.600	8.15	0.898	1.700	8.75	0.950
1.800	9.35	1.002	1.900	9.95	1.053	2.000	10.55	1.105
Station 12.287								
0.000	0.00	0.000	0.100	0.13	0.066	0.200	0.42	0.131
0.300	0.81	0.192	0.400	1.25	0.250	0.500	1.74	0.308
0.600	2.25	0.364	0.700	2.78	0.420	0.800	3.33	0.475
0.900	3.88	0.530	1.000	4.45	0.584	1.100	5.02	0.638
1.200	5.60	0.691	1.300	6.18	0.745	1.400	6.77	0.798
1.500	7.36	0.850	1.600	7.95	0.903	1.700	8.55	0.955
1.800	9.14	1.007	1.900	9.74	1.059	2.000	10.34	1.111
Station 12.969								
0.000	0.00	0.000	0.100	0.12	0.066	0.200	0.40	0.130
0.300	0.77	0.191	0.400	1.19	0.250	0.500	1.65	0.307
0.600	2.13	0.364	0.700	2.64	0.420	0.800	3.17	0.476
0.900	3.71	0.531	1.000	4.26	0.586	1.100	4.82	0.640
1.200	5.38	0.695	1.300	5.96	0.748	1.400	6.53	0.802
1.500	7.11	0.855	1.600	7.70	0.908	1.700	8.28	0.961
1.800	8.87	1.014	1.900	9.46	1.066	2.000	10.05	1.119
Station 13.652								
0.000	0.00	0.000	0.100	0.11	0.066	0.200	0.37	0.130
0.300	0.72	0.191	0.400	1.11	0.249	0.500	1.54	0.307
0.600	2.00	0.364	0.700	2.48	0.421	0.800	2.99	0.478
0.900	3.50	0.533	1.000	4.03	0.589	1.100	4.57	0.644
1.200	5.12	0.699	1.300	5.68	0.753	1.400	6.24	0.808
1.500	6.81	0.862	1.600	7.38	0.915	1.700	7.96	0.969
1.800	8.54	1.022	1.900	9.12	1.075	2.000	9.70	1.128
Station 14.334								
0.000	0.00	0.000	0.100	0.10	0.066	0.200	0.34	0.130
0.300	0.65	0.191	0.400	1.02	0.250	0.500	1.41	0.308
0.600	1.84	0.366	0.700	2.30	0.423	0.800	2.77	0.480
0.900	3.26	0.536	1.000	3.77	0.593	1.100	4.29	0.648
1.200	4.81	0.704	1.300	5.35	0.759	1.400	5.90	0.815
1.500	6.45	0.869	1.600	7.01	0.924	1.700	7.57	0.978
1.800	8.13	1.032	1.900	8.70	1.086	2.000	9.28	1.140
Station 15.017								
0.000	0.00	0.000	0.100	0.09	0.066	0.200	0.30	0.130
0.300	0.58	0.191	0.400	0.91	0.251	0.500	1.27	0.309

Height	Area	VCG	Height	Area	VCG	Height	Area	VCG
m	m ²	m	m	m ²	m	m	m ²	m
0.600	1.67	0.368	0.700	2.09	0.426	0.800	2.53	0.483
0.900	2.99	0.540	1.000	3.46	0.597	1.100	3.95	0.654
1.200	4.46	0.711	1.300	4.97	0.767	1.400	5.49	0.823
1.500	6.02	0.879	1.600	6.56	0.934	1.700	7.10	0.989
1.800	7.65	1.044	1.900	8.20	1.099	2.000	8.76	1.154

Station 15.700

0.000	0.00	0.000	0.100	0.08	0.066	0.200	0.26	0.131
0.300	0.50	0.192	0.400	0.79	0.252	0.500	1.12	0.311
0.600	1.47	0.370	0.700	1.85	0.429	0.800	2.26	0.488
0.900	2.68	0.546	1.000	3.12	0.604	1.100	3.58	0.661
1.200	4.05	0.719	1.300	4.53	0.776	1.400	5.03	0.833
1.500	5.53	0.890	1.600	6.04	0.946	1.700	6.56	1.002
1.800	7.09	1.058	1.900	7.62	1.114	2.000	8.16	1.169

Station 16.382

0.001	0.00	0.000	0.100	0.06	0.066	0.200	0.21	0.130
0.300	0.42	0.192	0.400	0.66	0.254	0.500	0.95	0.314
0.600	1.26	0.374	0.700	1.60	0.434	0.800	1.96	0.493
0.900	2.34	0.553	1.000	2.74	0.611	1.100	3.16	0.670
1.200	3.60	0.729	1.300	4.04	0.787	1.400	4.50	0.845
1.500	4.97	0.903	1.600	5.45	0.960	1.700	5.94	1.018
1.800	6.44	1.075	1.900	6.95	1.132	2.000	7.46	1.188

Station 17.065

0.007	0.00	0.000	0.100	0.05	0.068	0.200	0.16	0.132
0.300	0.32	0.195	0.400	0.52	0.257	0.500	0.76	0.319
0.600	1.02	0.380	0.700	1.31	0.441	0.800	1.63	0.502
0.900	1.96	0.563	1.000	2.32	0.623	1.100	2.69	0.683
1.200	3.08	0.742	1.300	3.48	0.802	1.400	3.90	0.861
1.500	4.33	0.920	1.600	4.77	0.979	1.700	5.23	1.038
1.800	5.69	1.096	1.900	6.17	1.155	2.000	6.65	1.213

Station 17.747

0.037	0.00	0.000	0.100	0.02	0.079	0.200	0.09	0.143
0.300	0.20	0.207	0.400	0.35	0.271	0.500	0.53	0.334
0.600	0.74	0.396	0.700	0.98	0.459	0.800	1.24	0.521
0.900	1.52	0.583	1.000	1.82	0.644	1.100	2.14	0.705
1.200	2.47	0.767	1.300	2.82	0.828	1.400	3.19	0.888
1.500	3.57	0.949	1.600	3.97	1.009	1.700	4.37	1.070
1.800	4.79	1.130	1.900	5.23	1.190	2.000	5.67	1.250

Station 18.430

0.117	0.00	0.117	0.200	0.02	0.170	0.300	0.08	0.235
0.400	0.18	0.299	0.500	0.30	0.363	0.600	0.44	0.427
0.700	0.62	0.491	0.800	0.81	0.554	0.900	1.02	0.617
1.000	1.26	0.681	1.100	1.51	0.744	1.200	1.79	0.806
1.300	2.08	0.869	1.400	2.38	0.932	1.500	2.71	0.994
1.600	3.04	1.057	1.700	3.40	1.119	1.800	3.76	1.181

Height	Area	VCG	Height	Area	VCG	Height	Area	VCG
m	m ²	m	m	m ²	m	m	m ²	m
1.900	4.14	1.243	2.000	4.54	1.305			

Station 19.113

0.315	0.00	0.000	0.400	0.02	0.368	0.500	0.07	0.431
0.600	0.15	0.494	0.700	0.24	0.558	0.800	0.36	0.622
0.900	0.50	0.686	1.000	0.66	0.751	1.100	0.83	0.816
1.200	1.03	0.881	1.300	1.24	0.946	1.400	1.48	1.011
1.500	1.73	1.075	1.600	2.00	1.140	1.700	2.28	1.204
1.800	2.58	1.268	1.900	2.90	1.333	2.000	3.23	1.397

Station 19.795

0.783	0.00	0.000	0.800	0.00	0.794	0.900	0.02	0.859
1.000	0.07	0.925	1.100	0.14	0.991	1.200	0.23	1.057
1.300	0.34	1.123	1.400	0.47	1.189	1.500	0.62	1.254
1.600	0.80	1.319	1.700	0.99	1.384	1.800	1.20	1.450
1.900	1.43	1.515	2.000	1.68	1.581			

Station 20.478

1.521	0.00	0.000	1.600	0.02	1.571	1.700	0.07	1.636
1.800	0.15	1.701	1.900	0.26	1.766	2.000	0.39	1.831

Station 21.160

New loading condition

The Dalmation

Designer Colm Molder

Created by M. van Engeland

Comment

Filename The_Dalmation_V2.fbm


Design length	20.000 m	Midship location	10.000 m
Length of buoyancy model	21.916 m	Water density	1.0000
Design beam	6.000 m	Mean shell thickness	0.0125 m
Maximum beam	6.000 m	Appendage coefficient	1.0000
Design draft	1.250 m		




Calculation settings

Heel to : Side with least stability

Center of gravity of tanks containing liquids : Actual COG

Wind silhouette 1

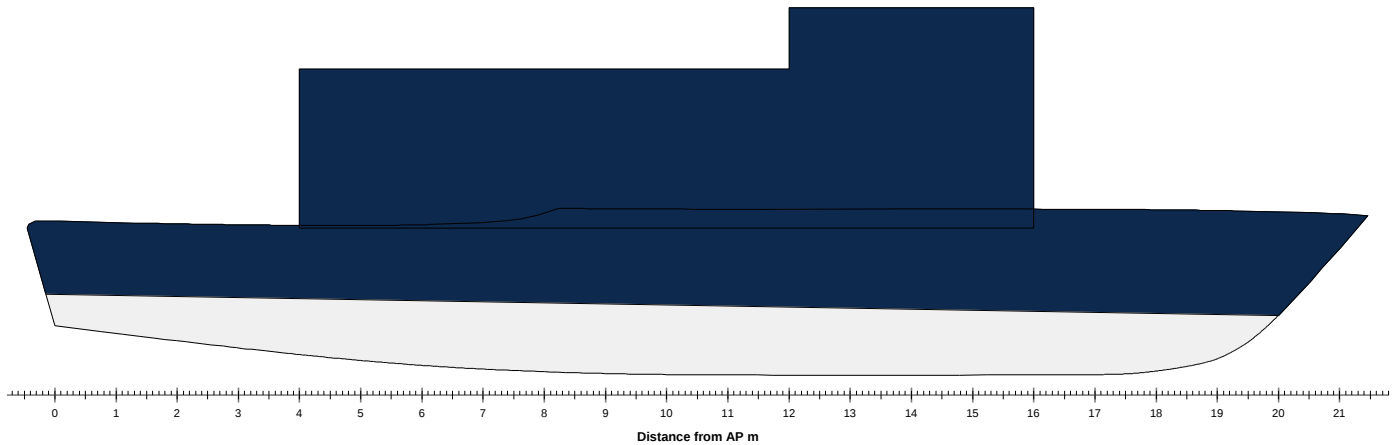

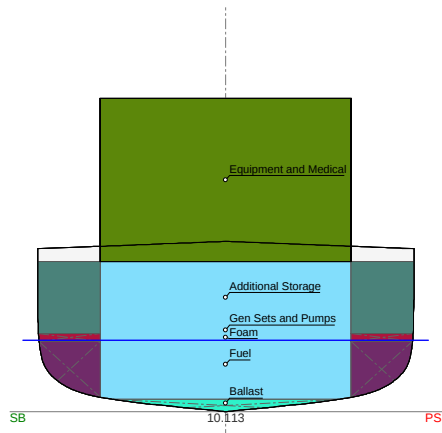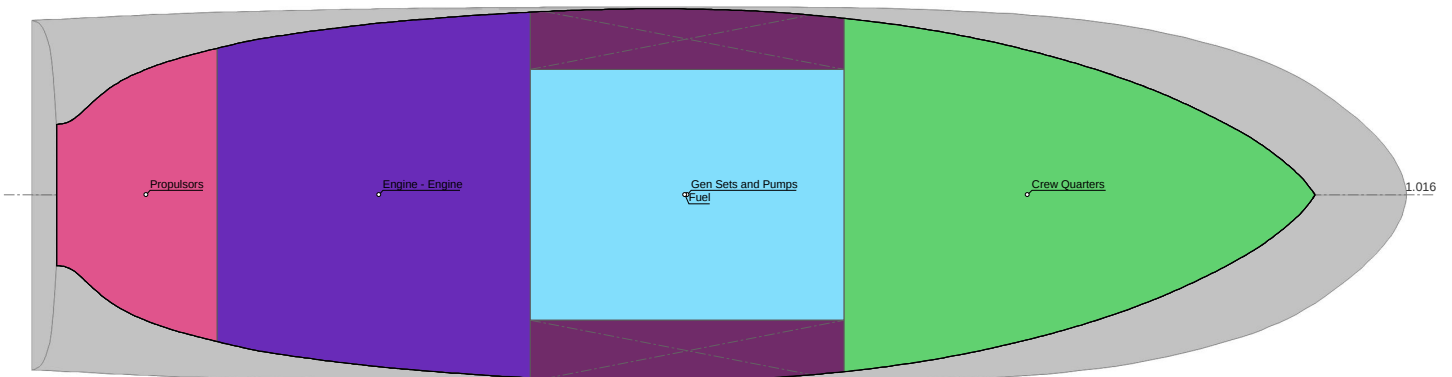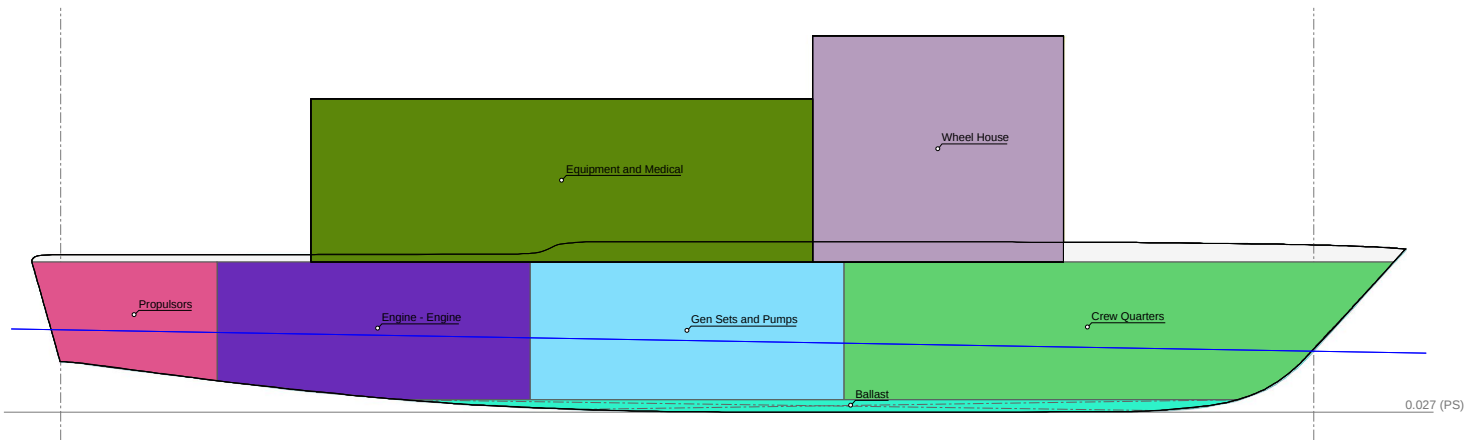


Hydrostatic particulars

List	0.0 (PS) degr	VCG	2.278 m
Draft aft pp	1.313 m	GG'	0.000 m
Mean moulded draft	1.143 m	VCG'	2.278 m
Draft forward pp	0.972 m	Max VCG'	2.332 m
Trim	-0.341 m	GM solid	1.613 m
LCF	9.031 m	G'M liquid	1.613 m
LCB	9.394 m	Immersion rate	0.994 t/cm
KM	3.891 m	MCT	1.286 t*m

Description	Density	Filling	Weight	LCG	TCG	VCG	FSM			
		%	t	m	m	m	t*m			
Engines										
Engine - Engine	0.1400	100.0	6.565	5.121	0.000 (PS)	1.433	0.000			
Fuel										
Fuel	0.7500	100.0	3.720	9.947	0.000 (CL)	0.765	0.000			
Water Jet Propulsors										
Propulsors	0.1170	100.0	2.205	1.185	0.000 (PS)	1.670	0.000			
Diesel Gen Sets and Pump Machinery										
Gen Sets and Pumps	0.0269	100.0	1.004	10.002	0.000 (CL)	1.302	0.000			
Crew Quarters										
Crew Quarters	0.0100	100.0	0.633	15.664	0.000 (SB)	1.453	0.000			
Equipment and Medical										
Equipment and Medical	0.0100	100.0	0.790	8.000	0.000 (CL)	3.700	0.000			
Wheel House										
Wheel House	0.0100	100.0	0.547	14.000	0.000 (CL)	4.200	0.000			
Potable Water										
Potable Water	1.0000	100.0	0.189	11.994	0.000 (CL)	1.185	0.000			
Foam										
Foam	1.0000	100.0	0.809	9.502	0.000 (CL)	1.185	0.000			
Additional Storage										
Additional Storage	0.0100	100.0	0.108	9.993	0.000 (CL)	1.827	0.000			
Ballast										
Ballast	1.0000	100.0	2.547	12.016	0.000 (PS)	0.135	0.000			
Lightship			56.196	9.977	0.000 (CL)	2.606				
Deadweight			19.118	7.784	0.000 (PS)	1.313	0.000			
Displacement			75.314	9.420	0.000 (CL)	2.278	0.000			
Righting levers										
Heeling angle	Draft	Trim	Displacement	KN sin(ø)	VCG sin(ø)	GG' sin(ø)	TCG cos(ø)	GZ	Area	
degr	m	m	t	m	m	m	m	m	mrad	
0.0 (CL)	1.143	-0.341	75.314	0.000	0.000	0.000	0.000	0.000	0.0000	
2.0 (PS)	1.142	-0.340	75.314	0.136	0.080	0.000	0.000	0.056	0.0010	
5.0 (PS)	1.138	-0.335	75.314	0.338	0.199	0.000	0.000	0.140	0.0061	
10.0 (PS)	1.125	-0.320	75.313	0.669	0.396	0.000	0.000	0.273	0.0242	
15.0 (PS)	1.099	-0.296	75.313	0.980	0.590	0.000	0.000	0.391	0.0533	
20.0 (PS)	1.056	-0.259	75.314	1.259	0.779	0.000	0.000	0.480	0.0916	
30.0 (PS)	0.905	-0.173	75.314	1.702	1.139	0.000	0.000	0.563	0.1845	

Righting levers

Heeling angle	Draft	Trim	Displacement	KN sin(θ)	VCG sin(θ)	GG' sin(θ)	TCG cos(θ)	GZ	Area
degr	m	m	t	m	m	m	m	m	mrad
40.0 (PS)	0.687	-0.158	75.314	1.957	1.464	0.000	0.000	0.493	0.2788
50.0 (PS)	0.359	-0.147	75.313	2.086	1.745	0.000	0.000	0.341	0.3519
60.0 (PS)	-0.241	-0.127	75.313	2.157	1.973	0.000	0.000	0.184	0.3976

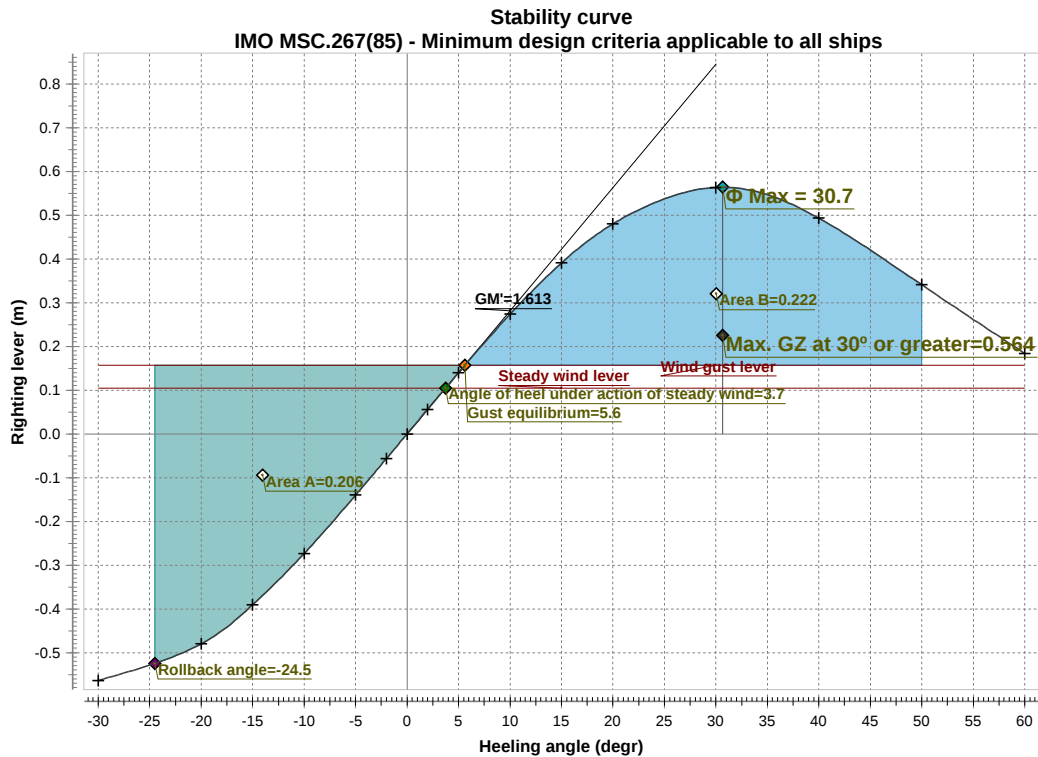

IMO MSC.267(85) - Minimum design criteria applicable to all ships

International Code on Intact Stability (2008), Part A, §2.2 - §2.3


Description	Attained value	Criterion	Required value	Complies
Area 0° - 30°	0.1845 mrad	$\geq$	0.0550 mrad	Complies
Lower angle of range	0.0 degr			
Upper angle of range	30.0 degr			
Area 0° - 40°	0.2788 mrad	$\geq$	0.0900 mrad	Complies
Lower angle of range	0.0 degr			
Upper angle of range	40.0 degr			
Area 30° - 40°	0.0943 mrad	$\geq$	0.0300 mrad	Complies
Lower angle of range	30.0 degr			
Upper angle of range	40.0 degr			
Max. GZ at 30° or greater	0.564 m	$\geq$	0.200 m	Complies
Lower angle of range	30.0 degr			
Upper angle of range	90.0 degr			
Angle of max GZ	30.7 degr	$\geq$	25.0 degr	Complies
Initial metacentric height	1.613 m	$\geq$	0.150 m	Complies
Severe wind and rolling criterion (weather criterion)				Complies
Wind silhouette:	Wind silhouette 1			

Wind speed	50.54	kn			
Wind pressure	51.37	kg/m ²			
Wind area	66.26	m ²			
Steady wind lever	0.105	m			
Deck immersion angle	180.0	degr			
Wind gust lever	0.157	m			
Ratio of areaA/areaB	0.927		<=	1.000	Complies
Maximum allowed static heeling angle	3.7	degr	<=	16.0 degr	Complies
Max allowed ratio static angle/deck immersion angle	0.021		<=	0.800	Complies

The condition complies with the stability criteria

Floodable length calculation.

Input data		
Displacement	84.920	t
LCG	8.560	m
VCG	2.150	m
Permeability	0.950	

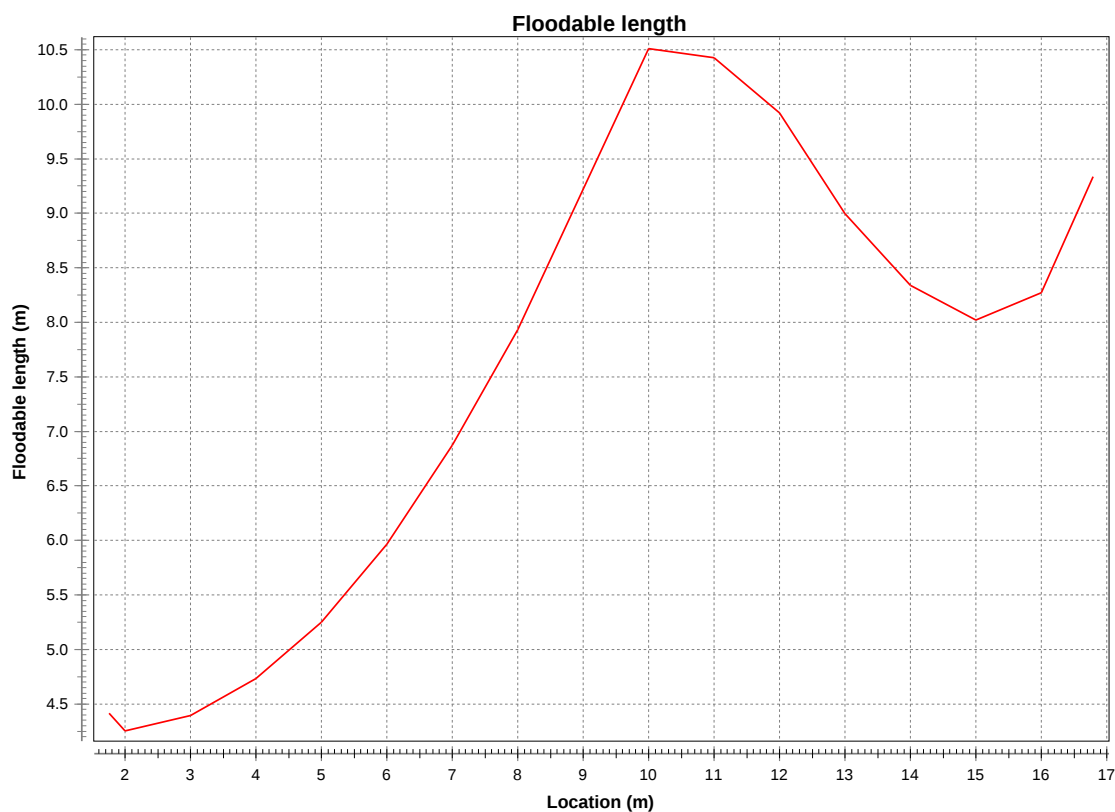


Location m	Floodable length m	Flooded from m	Flooded to m	Flooded volume m ³	Flooded LCG m	Draft m	Trim m
1.754	4.417	-0.455	3.962	35.947	1.986	1.447	-3.177
2.000	4.253	-0.126	4.126	36.519	2.142	1.455	-3.151
3.000	4.395	0.803	5.197	40.372	3.092	1.506	-2.977
4.000	4.733	1.634	6.366	45.036	4.043	1.566	-2.778
5.000	5.252	2.374	7.626	50.782	5.001	1.637	-2.544
6.000	5.965	3.018	8.982	58.056	5.972	1.722	-2.260
7.000	6.870	3.565	10.435	67.412	6.951	1.825	-1.914
8.000	7.930	4.035	11.965	78.753	7.933	1.942	-1.456
9.000	9.219	4.391	13.609	96.217	8.915	2.116	-0.946
10.000	10.510	4.745	15.255	117.796	9.933	2.317	-0.262
11.000	10.429	5.786	16.214	117.382	10.948	2.324	0.353
12.000	9.922	7.039	16.961	112.803	11.955	2.301	0.970
13.000	8.996	8.502	17.498	102.311	12.913	2.245	1.541
14.000	8.337	9.832	18.168	93.278	13.804	2.198	2.016
15.000	8.020	10.990	19.010	85.817	14.636	2.157	2.429
16.000	8.270	11.865	20.135	80.240	15.325	2.124	2.760

Location	Floodable length	Flooded from	Flooded to	Flooded volume	Flooded LCG	Draft	Trim
m	m	m	m	m ³	m	m	m
16.792	9.338	12.123	21.461	78.550	15.546	2.113	2.868

Calculation of wind moments

Wind silhouette : Wind silhouette 1

Wind silhouette 1

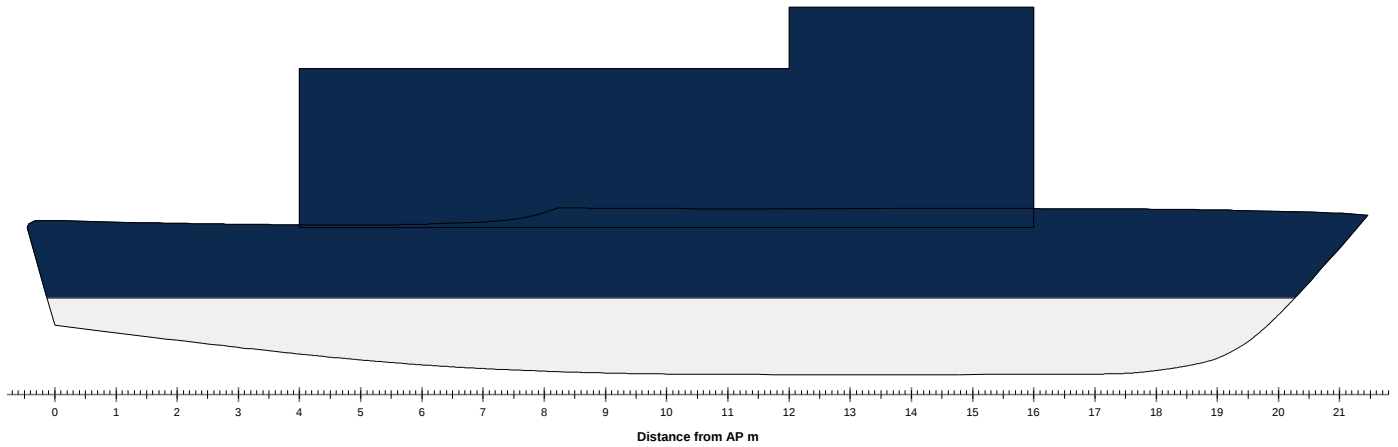

Wind pressure 50.00 kg/m²

Bilge type: Round bilges

Bilge keel area: 0.00 m²

Draft	Lateral area	LCE	VCE	Wind area	LCE	VCE	Wind lever	Wind moment
m	m ²	m	m	m ²	m	m	m	t*m
0.100	0.98	12.990	0.053	84.50	10.569	2.466	10.710	10.194
0.200	2.22	12.616	0.108	83.26	10.542	2.500	2.771	9.958
0.300	3.63	12.337	0.164	81.84	10.519	2.539	1.269	9.721
0.400	5.17	12.090	0.219	80.31	10.500	2.581	0.738	9.483
0.500	6.81	11.861	0.275	78.66	10.487	2.625	0.487	9.244
0.600	8.56	11.642	0.331	76.92	10.480	2.672	0.347	9.004
0.700	10.40	11.428	0.388	75.08	10.481	2.722	0.261	8.763
0.800	12.33	11.218	0.445	73.14	10.491	2.774	0.203	8.519
0.900	14.32	11.039	0.501	71.15	10.507	2.828	0.163	8.279
1.000	16.32	10.907	0.556	69.15	10.523	2.882	0.134	8.044
1.100	18.34	10.808	0.610	67.14	10.538	2.937	0.112	7.812
1.200	20.37	10.731	0.664	65.11	10.554	2.993	0.095	7.582
1.300	22.41	10.671	0.717	63.07	10.570	3.049	0.082	7.354
1.400	24.46	10.623	0.770	61.02	10.586	3.107	0.071	7.127
1.500	26.52	10.585	0.823	58.95	10.601	3.165	0.062	6.901
1.600	28.60	10.554	0.876	56.88	10.617	3.223	0.055	6.676
1.700	30.68	10.530	0.929	54.79	10.634	3.283	0.049	6.451
1.800	32.78	10.510	0.981	52.69	10.650	3.344	0.043	6.226
1.900	34.89	10.495	1.034	50.58	10.666	3.407	0.039	6.001
2.000	37.01	10.483	1.086	48.46	10.683	3.471	0.035	5.777

Wind pressure 75.00 kg/m²

Bilge type: Round bilges

Bilge keel area: 0.00 m²

Draft	Lateral area	LCE	VCE	Wind area	LCE	VCE	Wind lever	Wind moment
m	m ²	m	m	m ²	m	m	m	t*m
0.100	0.98	12.990	0.053	84.50	10.569	2.466	16.065	15.291
0.200	2.22	12.616	0.108	83.26	10.542	2.500	4.156	14.937
0.300	3.63	12.337	0.164	81.84	10.519	2.539	1.903	14.581
0.400	5.17	12.090	0.219	80.31	10.500	2.581	1.107	14.225
0.500	6.81	11.861	0.275	78.66	10.487	2.625	0.731	13.867
0.600	8.56	11.642	0.331	76.92	10.480	2.672	0.521	13.506
0.700	10.40	11.428	0.388	75.08	10.481	2.722	0.391	13.144
0.800	12.33	11.218	0.445	73.14	10.491	2.774	0.305	12.779
0.900	14.32	11.039	0.501	71.15	10.507	2.828	0.244	12.418
1.000	16.32	10.907	0.556	69.15	10.523	2.882	0.201	12.065
1.100	18.34	10.808	0.610	67.14	10.538	2.937	0.168	11.717
1.200	20.37	10.731	0.664	65.11	10.554	2.993	0.143	11.373
1.300	22.41	10.671	0.717	63.07	10.570	3.049	0.123	11.031
1.400	24.46	10.623	0.770	61.02	10.586	3.107	0.107	10.691
1.500	26.52	10.585	0.823	58.95	10.601	3.165	0.093	10.352
1.600	28.60	10.554	0.876	56.88	10.617	3.223	0.082	10.014
1.700	30.68	10.530	0.929	54.79	10.634	3.283	0.073	9.676
1.800	32.78	10.510	0.981	52.69	10.650	3.344	0.065	9.339
1.900	34.89	10.495	1.034	50.58	10.666	3.407	0.058	9.002
2.000	37.01	10.483	1.086	48.46	10.683	3.471	0.052	8.665

Wind pressure 100.00 kg/m²

Bilge type: Round bilges

Bilge keel area: 0.00 m²

Draft	Lateral area	LCE	VCE	Wind area	LCE	VCE	Wind lever	Wind moment
m	m ²	m	m	m ²	m	m	m	t*m
0.100	0.98	12.990	0.053	84.50	10.569	2.466	21.420	20.388
0.200	2.22	12.616	0.108	83.26	10.542	2.500	5.542	19.916
0.300	3.63	12.337	0.164	81.84	10.519	2.539	2.538	19.442
0.400	5.17	12.090	0.219	80.31	10.500	2.581	1.476	18.967
0.500	6.81	11.861	0.275	78.66	10.487	2.625	0.974	18.489
0.600	8.56	11.642	0.331	76.92	10.480	2.672	0.694	18.009
0.700	10.40	11.428	0.388	75.08	10.481	2.722	0.521	17.525
0.800	12.33	11.218	0.445	73.14	10.491	2.774	0.406	17.039
0.900	14.32	11.039	0.501	71.15	10.507	2.828	0.326	16.558
1.000	16.32	10.907	0.556	69.15	10.523	2.882	0.268	16.087
1.100	18.34	10.808	0.610	67.14	10.538	2.937	0.224	15.623
1.200	20.37	10.731	0.664	65.11	10.554	2.993	0.191	15.164
1.300	22.41	10.671	0.717	63.07	10.570	3.049	0.164	14.708
1.400	24.46	10.623	0.770	61.02	10.586	3.107	0.142	14.254
1.500	26.52	10.585	0.823	58.95	10.601	3.165	0.125	13.802
1.600	28.60	10.554	0.876	56.88	10.617	3.223	0.110	13.352
1.700	30.68	10.530	0.929	54.79	10.634	3.283	0.098	12.902
1.800	32.78	10.510	0.981	52.69	10.650	3.344	0.087	12.452
1.900	34.89	10.495	1.034	50.58	10.666	3.407	0.078	12.003
2.000	37.01	10.483	1.086	48.46	10.683	3.471	0.070	11.554

Wind pressure 125.00 kg/m²

Bilge type: Round bilges

Bilge keel area: 0.00 m²

Draft	Lateral area	LCE	VCE	Wind area	LCE	VCE	Wind lever	Wind moment
m	m ²	m	m	m ²	m	m	m	t*m
0.100	0.98	12.990	0.053	84.50	10.569	2.466	26.775	25.485
0.200	2.22	12.616	0.108	83.26	10.542	2.500	6.927	24.895
0.300	3.63	12.337	0.164	81.84	10.519	2.539	3.172	24.302
0.400	5.17	12.090	0.219	80.31	10.500	2.581	1.845	23.708
0.500	6.81	11.861	0.275	78.66	10.487	2.625	1.218	23.111
0.600	8.56	11.642	0.331	76.92	10.480	2.672	0.868	22.511
0.700	10.40	11.428	0.388	75.08	10.481	2.722	0.651	21.907
0.800	12.33	11.218	0.445	73.14	10.491	2.774	0.508	21.299
0.900	14.32	11.039	0.501	71.15	10.507	2.828	0.407	20.697
1.000	16.32	10.907	0.556	69.15	10.523	2.882	0.335	20.109
1.100	18.34	10.808	0.610	67.14	10.538	2.937	0.280	19.529
1.200	20.37	10.731	0.664	65.11	10.554	2.993	0.238	18.955
1.300	22.41	10.671	0.717	63.07	10.570	3.049	0.205	18.385
1.400	24.46	10.623	0.770	61.02	10.586	3.107	0.178	17.818
1.500	26.52	10.585	0.823	58.95	10.601	3.165	0.156	17.253
1.600	28.60	10.554	0.876	56.88	10.617	3.223	0.137	16.690
1.700	30.68	10.530	0.929	54.79	10.634	3.283	0.122	16.127
1.800	32.78	10.510	0.981	52.69	10.650	3.344	0.109	15.565
1.900	34.89	10.495	1.034	50.58	10.666	3.407	0.097	15.004
2.000	37.01	10.483	1.086	48.46	10.683	3.471	0.087	14.442

Wind pressure 150.00 kg/m²

Bilge type: Round bilges

Bilge keel area: 0.00 m²

Draft	Lateral area	LCE	VCE	Wind area	LCE	VCE	Wind lever	Wind moment
m	m ²	m	m	m ²	m	m	m	t*m
0.100	0.98	12.990	0.053	84.50	10.569	2.466	32.130	30.582
0.200	2.22	12.616	0.108	83.26	10.542	2.500	8.313	29.874
0.300	3.63	12.337	0.164	81.84	10.519	2.539	3.807	29.163
0.400	5.17	12.090	0.219	80.31	10.500	2.581	2.214	28.450
0.500	6.81	11.861	0.275	78.66	10.487	2.625	1.462	27.733
0.600	8.56	11.642	0.331	76.92	10.480	2.672	1.041	27.013
0.700	10.40	11.428	0.388	75.08	10.481	2.722	0.782	26.288
0.800	12.33	11.218	0.445	73.14	10.491	2.774	0.609	25.558
0.900	14.32	11.039	0.501	71.15	10.507	2.828	0.489	24.837
1.000	16.32	10.907	0.556	69.15	10.523	2.882	0.402	24.131
1.100	18.34	10.808	0.610	67.14	10.538	2.937	0.336	23.435
1.200	20.37	10.731	0.664	65.11	10.554	2.993	0.286	22.746
1.300	22.41	10.671	0.717	63.07	10.570	3.049	0.246	22.062
1.400	24.46	10.623	0.770	61.02	10.586	3.107	0.213	21.382
1.500	26.52	10.585	0.823	58.95	10.601	3.165	0.187	20.704
1.600	28.60	10.554	0.876	56.88	10.617	3.223	0.165	20.027
1.700	30.68	10.530	0.929	54.79	10.634	3.283	0.146	19.352
1.800	32.78	10.510	0.981	52.69	10.650	3.344	0.130	18.678
1.900	34.89	10.495	1.034	50.58	10.666	3.407	0.117	18.004
2.000	37.01	10.483	1.086	48.46	10.683	3.471	0.105	17.331

Resistance calculations.

Hollenbach.

Resistance according to Hollenbach							
Speed	Speed	Froude number	Frictional resistance	Residual resistance	Total resistance	Effective power	
kn	m/sec		kN	kN	kN	kW	
0.00	0.00	0.000	0.0000	0.0000	0.0000	0.00	
1.00	0.51	0.037	0.0423	0.0828	0.1252	0.06	
2.00	1.03	0.073	0.1505	0.2653	0.4157	0.43	
3.00	1.54	0.110	0.3170	0.4995	0.8165	1.26	
4.00	2.06	0.147	0.5385	0.8064	1.3449	2.77	
5.00	2.57	0.183	0.8128	1.2753	2.0881	5.37	
6.00	3.09	0.220	1.1384	2.0639	3.2023	9.88	
7.00	3.60	0.257	1.5139	3.3987	4.9126	17.69	
8.00	4.12	0.294	1.9384	5.5746	7.5130	30.92	
9.00	4.63	0.330	2.4110	8.9550	11.3660	52.62	

Savitsky.

Resistance according to Savitsky									
Speed	Speed	Froude number	Rn	Cf	Trim	Blount & Fox	Total resistance	Effective power	Planing
kn	m/sec				degr		kN	kW	
0.00	0.00	0.000	2.69E+6	0.003742	1.57	0.500	8.0746	0.81	no
1.00	0.51	0.037	1.38E+7	0.002855	1.57	0.500	8.1180	4.18	no
2.00	1.03	0.073	2.76E+7	0.002567	1.57	0.500	8.2404	8.48	no
3.00	1.54	0.110	4.13E+7	0.002417	1.58	0.500	8.4336	13.02	no
4.00	2.06	0.147	5.48E+7	0.002319	1.59	0.500	8.6941	17.89	no
5.00	2.57	0.183	6.83E+7	0.002247	1.60	0.500	9.0190	23.20	no
6.00	3.09	0.220	8.15E+7	0.002191	1.61	0.500	9.4055	29.03	no
7.00	3.60	0.257	9.44E+7	0.002146	1.63	0.500	9.8508	35.47	no
8.00	4.12	0.293	1.07E+8	0.002109	1.65	0.500	10.3524	42.61	no
9.00	4.63	0.330	1.19E+8	0.002077	1.67	0.500	10.9073	50.50	no
10.00	5.14	0.367	1.31E+8	0.002050	1.69	0.517	11.9139	61.29	no
11.00	5.66	0.403	1.43E+8	0.002026	1.72	0.770	18.7425	106.06	no
12.00	6.17	0.440	1.54E+8	0.002005	1.74	0.945	24.2896	149.95	no
13.00	6.69	0.477	1.65E+8	0.001987	1.77	1.061	28.8319	192.82	no
14.00	7.20	0.513	1.75E+8	0.001971	1.81	1.135	32.5848	234.68	no
15.00	7.72	0.550	1.85E+8	0.001957	1.84	1.178	35.7162	275.61	no
16.00	8.23	0.587	1.94E+8	0.001944	1.87	1.201	38.3599	315.74	no
17.00	8.75	0.623	2.02E+8	0.001933	1.91	1.208	40.6220	355.26	no
18.00	9.26	0.660	2.10E+8	0.001923	1.95	1.205	42.5845	394.33	no
19.00	9.77	0.697	2.17E+8	0.001914	1.99	1.195	44.3146	433.15	no
20.00	10.29	0.733	2.23E+8	0.001907	2.04	1.182	45.9955	473.24	no
21.00	10.80	0.770	2.29E+8	0.001900	2.09	1.166	47.5984	514.22	no
22.00	11.32	0.807	2.34E+8	0.001895	2.15	1.149	49.0748	555.42	no
23.00	11.83	0.843	2.39E+8	0.001890	2.20	1.133	50.4457	596.89	no
24.00	12.35	0.880	2.43E+8	0.001886	2.25	1.116	51.7298	638.69	no
25.00	12.86	0.917	2.47E+8	0.001882	2.29	1.101	52.9394	680.86	no
26.00	13.38	0.954	2.50E+8	0.001878	2.33	1.087	54.0874	723.45	no

Resistance according to Savitsky

Speed	Speed	Froude number	Rn	Cf	Trim	Blount & Fox	Total resistance	Effective power	Planing
kn	m/sec				degr		kN	kW	
27.00	13.89	0.990	2.53E+8	0.001875	2.36	1.074	55.1836	766.50	yes
28.00	14.40	1.027	2.56E+8	0.001872	2.38	1.062	56.2385	810.08	yes
29.00	14.92	1.064	2.59E+8	0.001869	2.40	1.052	57.2620	854.29	yes
30.00	15.43	1.100	2.62E+8	0.001866	2.42	1.042	58.2639	899.21	yes
31.00	15.95	1.137	2.65E+8	0.001864	2.42	1.034	59.2531	944.96	yes
32.00	16.46	1.174	2.68E+8	0.001861	2.42	1.027	60.2397	991.68	yes
33.00	16.98	1.210	2.72E+8	0.001858	2.41	1.020	61.2316	1039.51	yes
34.00	17.49	1.247	2.75E+8	0.001855	2.39	1.015	62.2381	1088.61	yes
35.00	18.01	1.284	2.79E+8	0.001852	2.37	1.010	63.2653	1139.13	yes
36.00	18.52	1.320	2.83E+8	0.001849	2.35	1.006	64.3183	1191.18	yes

Delft Series ('98).

Resistance according to Delft Series ('98)

Speed	Speed	Froude number	Frictional resistance	Residual resistance	Total resistance	Effective power
kn	m/sec		kN	kN	kN	kW
0.00	0.00	0.000	0.0000	0.0000	0.0000	0.00
1.00	0.51	0.037	0.0451	0.0000	0.0451	0.02
2.00	1.03	0.073	0.1598	0.0000	0.1598	0.16
3.00	1.54	0.110	0.3359	0.0000	0.3359	0.52
4.00	2.06	0.147	0.5698	0.0000	0.5698	1.17
5.00	2.57	0.183	0.8592	0.0000	0.8592	2.21
6.00	3.09	0.220	1.2024	0.3575	1.5600	4.82
7.00	3.60	0.257	1.5981	0.9677	2.5658	9.24
8.00	4.12	0.293	2.0451	1.9467	3.9918	16.43
9.00	4.63	0.330	2.5425	3.7981	6.3407	29.36
10.00	5.14	0.367	3.0896	6.8051	9.8947	50.90
11.00	5.66	0.403	3.6857	11.2906	14.9762	84.75
12.00	6.17	0.440	4.3301	19.0032	23.3332	144.04
13.00	6.69	0.477	5.0223	30.1152	35.1375	234.99
14.00	7.20	0.513	5.7618	41.1255	46.8873	337.69
15.00	7.72	0.550	6.5482	49.7608	56.3090	434.52
16.00	8.23	0.587	7.3810	52.9474	60.3284	496.57


John Winters (KAPER).




Resistance according to John Winters (KAPER)

Speed	Speed	Froude number	Frictional resistance	Residual resistance	Total resistance
kn	m/sec		kN	kN	kN
0.00	0.000	0.000	0.0000	0.0000	0.0000
1.00	0.514	0.037	0.0423	0.0001	0.0424
2.00	1.029	0.073	0.1505	0.0008	0.1513
3.00	1.543	0.110	0.3170	0.0032	0.3202
4.00	2.058	0.147	0.5385	0.0074	0.5459
5.00	2.572	0.183	0.8128	0.0122	0.8250
6.00	3.087	0.220	1.1384	0.0166	1.1550
7.00	3.601	0.257	1.5139	0.0249	1.5388

Resistance according to John Winters (KAPER)


Speed kn	Speed m/sec	Froude number	Frictional resistance kN	Residual resistance kN	Total resistance kN
8.00	4.116	0.293	1.9384	0.0548	1.9932
9.00	4.630	0.330	2.4110	0.1353	2.5463
10.00	5.144	0.367	2.9310	0.3382	3.2693
11.00	5.659	0.403	3.4978	0.6701	4.1679

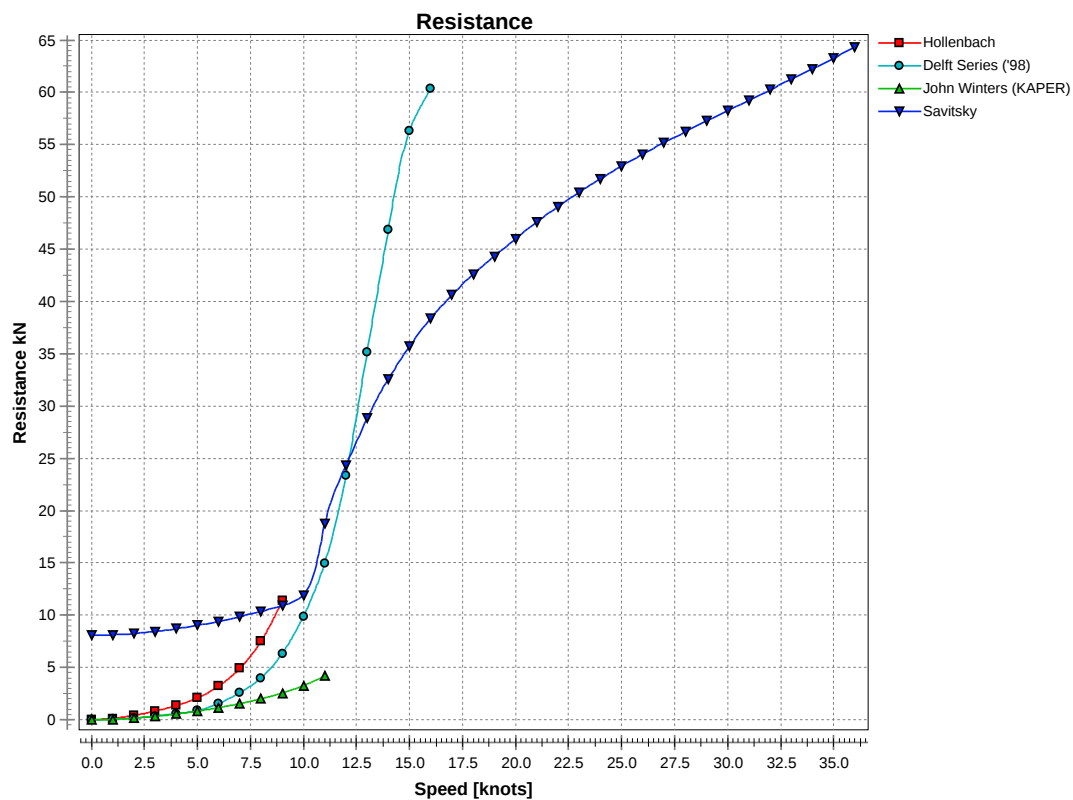

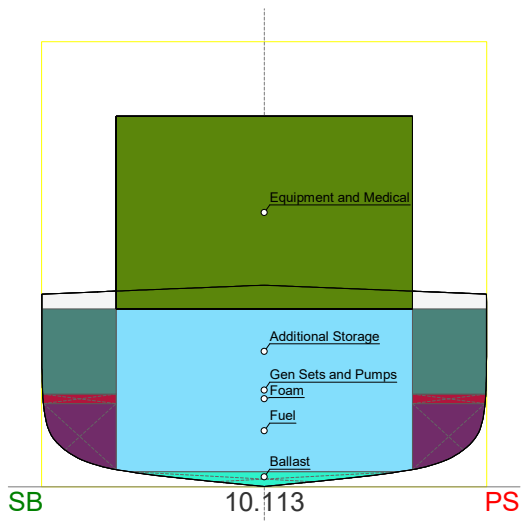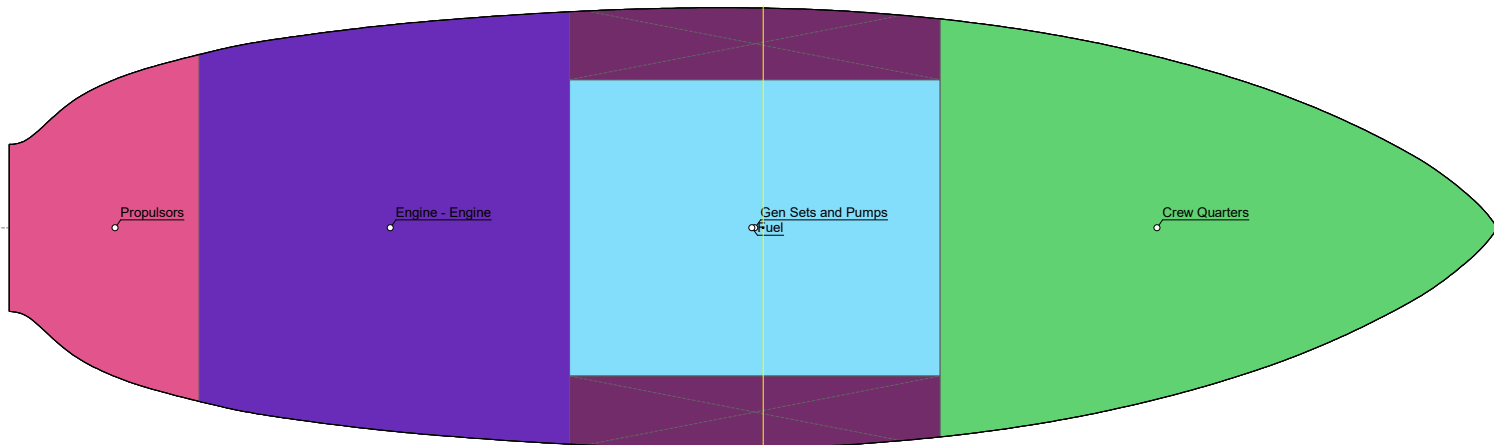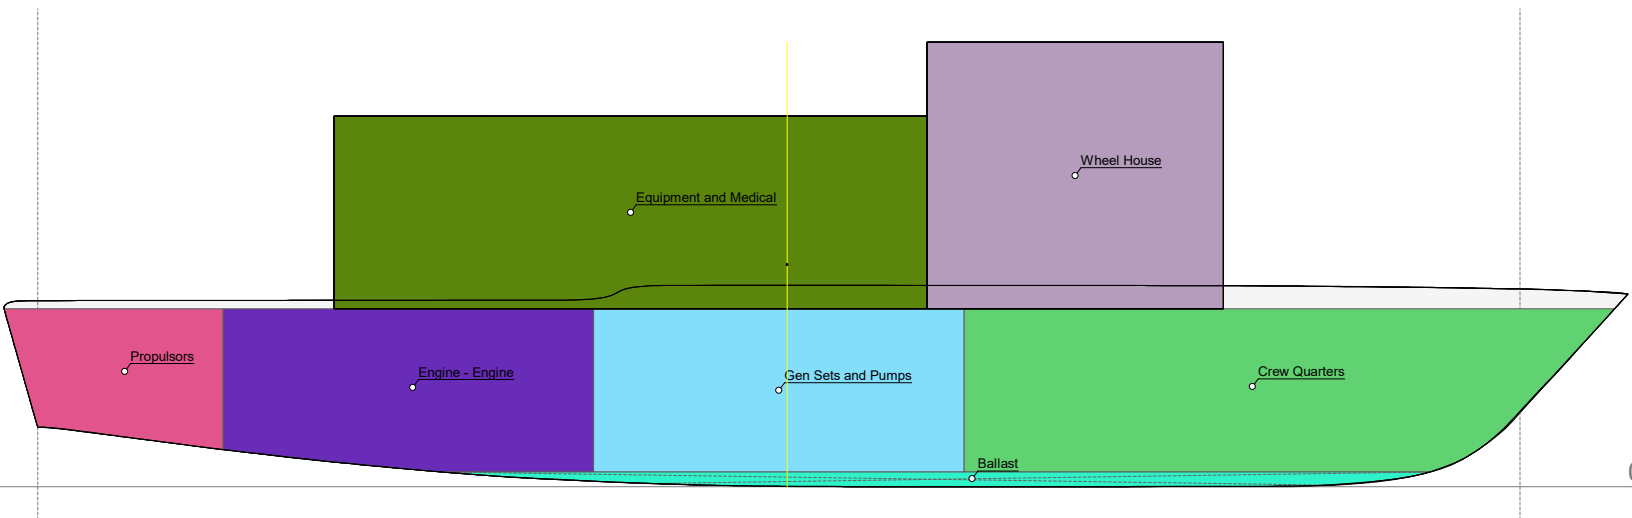

Tank and compartment layout

Tank arrangement drawing

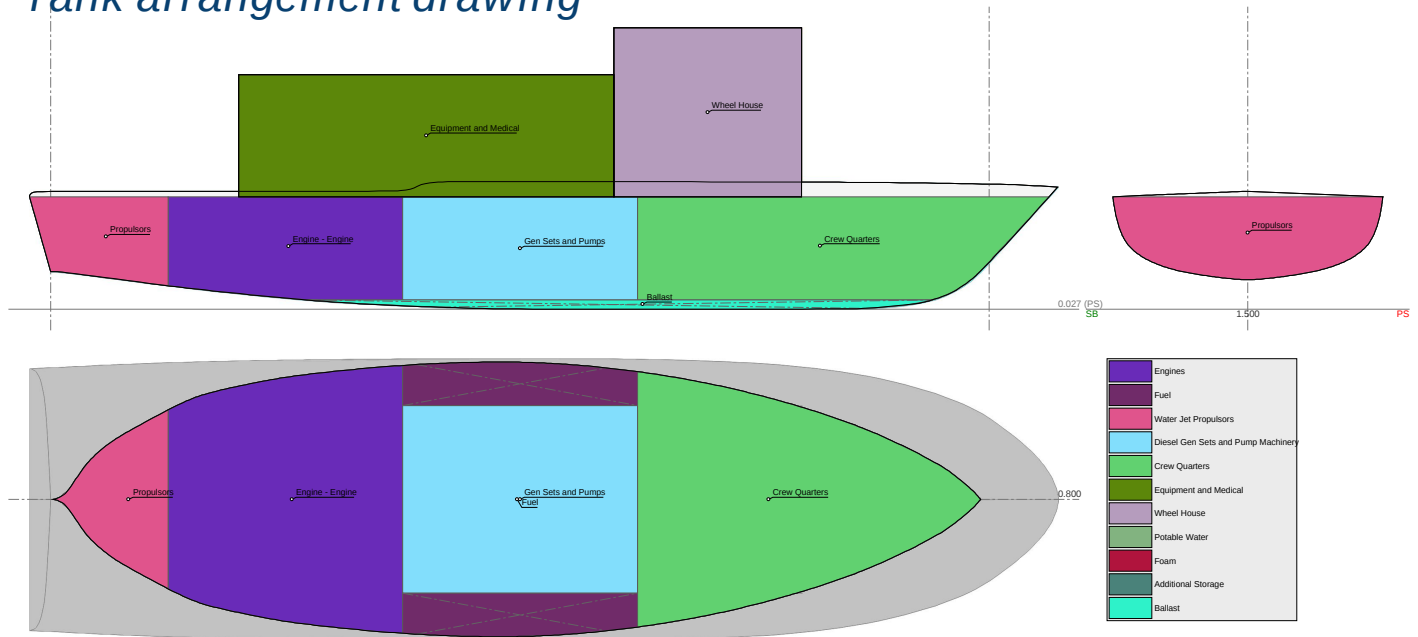

Tanks and compartments

Engines

Number	Tank description	Short name	Density	Moulded volume	Volume	Weight	LCG	TCG	VCG	Max FSM
				m ³	m ³	t	m	m	m	t*m
1	Engine	Engine	0.1400	55.169	46.894	6.565	5.121	0.000 (PS)	1.433	10.319
Total					46.894	6.565	5.121	0.000 (PS)	1.433	10.319

Fuel

Number	Tank description	Short name	Density	Moulded volume	Volume	Weight	LCG	TCG	VCG	Max FSM
				m ³	m ³	t	m	m	m	t*m
	Fuel		0.7500	6.200	4.960	3.720	9.947	0.000 (CL)	0.765	35.422
Total					4.960	3.720	9.947	0.000 (CL)	0.765	35.422

Water Jet Propulsors

Number	Tank description	Short name	Density	Moulded volume	Volume	Weight	LCG	TCG	VCG	Max FSM
				m ³	m ³	t	m	m	m	t*m
	Propulsors		0.1170	22.168	18.843	2.205	1.185	0.000 (PS)	1.670	4.543
Total					18.843	2.205	1.185	0.000 (PS)	1.670	4.543

Diesel Gen Sets and Pump Machinery

Number	Tank description	Short name	Density	Moulded volume	Volume	Weight	LCG	TCG	VCG	Max FSM
				m ³	m ³	t	m	m	m	t*m
	Gen Sets and Pumps		0.0269	43.907	37.321	1.004	10.002	0.000 (CL)	1.302	0.610
Total					37.321	1.004	10.002	0.000 (CL)	1.302	0.610

Crew Quarters

Number	Tank description	Short name	Density	Moulded volume m ³	Volume m ³	Weight t	LCG m	TCG m	VCG m	Max FSM t*m
	Crew Quarters		0.0100	66.659	63.326	0.633	15.664	0.000 (SB)	1.453	0.884
Total					63.326	0.633	15.664	0.000 (SB)	1.453	0.884

Equipment and Medical

Number	Tank description	Short name	Density	Moulded volume m ³	Volume m ³	Weight t	LCG m	TCG m	VCG m	Max FSM t*m
	Equipment and Medical		0.0100	83.200	79.040	0.790	8.000	0.000 (CL)	3.700	0.405
Total					79.040	0.790	8.000	0.000 (CL)	3.700	0.405

Wheel House

Number	Tank description	Short name	Density	Moulded volume m ³	Volume m ³	Weight t	LCG m	TCG m	VCG m	Max FSM t*m
	Wheel House		0.0100	57.600	54.720	0.547	14.000	0.000 (CL)	4.200	0.203
Total					54.720	0.547	14.000	0.000 (CL)	4.200	0.203

Potable Water

Number	Tank description	Short name	Density	Moulded volume m ³	Volume m ³	Weight t	LCG m	TCG m	VCG m	Max FSM t*m
	Potable Water		1.0000	0.236	0.189	0.189	11.994	0.000 (CL)	1.185	9.033
Total					0.189	0.189	11.994	0.000 (CL)	1.185	9.033

Foam

Number	Tank description	Short name	Density	Moulded volume m ³	Volume m ³	Weight t	LCG m	TCG m	VCG m	Max FSM t*m
	Foam		1.0000	1.011	0.809	0.809	9.502	0.000 (CL)	1.185	39.253
Total					0.809	0.809	9.502	0.000 (CL)	1.185	39.253

Additional Storage

Number	Tank description	Short name	Density	Moulded volume m ³	Volume m ³	Weight t	LCG m	TCG m	VCG m	Max FSM t*m
	Additional Storage		0.0100	11.354	10.787	0.108	9.993	0.000 (CL)	1.827	0.599
Total					10.787	0.108	9.993	0.000 (CL)	1.827	0.599

Ballast

Number	Tank description	Short name	Density	Moulded volume m ³	Volume m ³	Weight t	LCG m	TCG m	VCG m	Max FSM t*m
	Ballast		1.0000	3.184	2.547	2.547	12.016	0.000 (PS)	0.135	17.918
Total					2.547	2.547	12.016	0.000 (PS)	0.135	17.918